

www.projectcollection.co.uk

5
YEAR
warranty

2025/26

A modern interior space, likely a restaurant or lounge, featuring large circular pendant lights hanging from the ceiling. The room has large windows overlooking a city at night. In the foreground, there are round tables set with plates and chairs. The text 'project collection by searchlight' is overlaid on the image.

project collection by searchlight

CI/SfB (63)X

2025/26

project

collection

.....

the 2025 Project Collection is a toolkit crafted for lighting specifiers. Tailored to optimise lighting performance, it features architecturally designed solutions that align perfectly with project requirements. By seamlessly integrating technical innovation with creative vision, we deliver solutions that elevate both interior and exterior spaces.

useful information

GU10/Mini GU10 items

GU10 products are designed to fit a standard GU10 lamp length of 53mm. The specified minimum recess depth dimensions for our products are based on this standard length, ensuring clear installation guidelines. If a product is designed for a longer GU10 lamp length, this will be noted in the key features on the product page.

GU10 lamps are not included.

Mini GU10 lamps share the same lamp cap as standard GU10s. However, mini GU10 lamps have a smaller face diameter of only 35mm, making them ideal for applications requiring a smaller luminaire body.

Mini GU10 lamps are not included but can be purchased separately in a choice of CCT. See pg. 219 for more details.

Dimming

All dimmable products are compatible with mains leading and/or trailing edge dimming. We test all our dimmable products for compatibility with Varilight Pro-dimmer modules. We cannot guarantee the compatibility of other leading / trailing edge dimmers.

Lightsource/Luminaire lumens

Lightsource lumens measure the total light emitted directly from the light source, i.e. the LED PCB, without accounting for any losses due to the fixture's design. Luminaire lumens, on the other hand, measure the total light output from the complete luminaire, including any losses caused by the luminaire body, lenses, reflectors, or diffusers. When the product has a replaceable LED lightsource, the lightsource lumens are quoted on each page.

Colour Rendering Index (CRI)

All products have a minimum CRI >80. CRI>90 products are indicated on the page.

Living finishes

Living finishes change over time. Anodised finishes may appear slightly darker after a period of 3 years due to continued oxidation of the surface of the product.

Warranty

All products are manufactured and inspected in order to meet the technical and quality standards demanded by the market. These come with a standard 5-year warranty out of the box.

We understand that coastal environments can subject products to unique challenges, such as saltwater exposure and extreme weather conditions, our 5-year warranty includes all outdoor products with this icon, when used in locations up to 1km from the coast.



Products with this icon are limited stock items.

Scan here for further help & advice.



contents ceiling

24-25

New

26-27



grace



prisma



New

28-29



vistina round

30-31

32-33

34-36

New




vistina long



lino 2

37

New

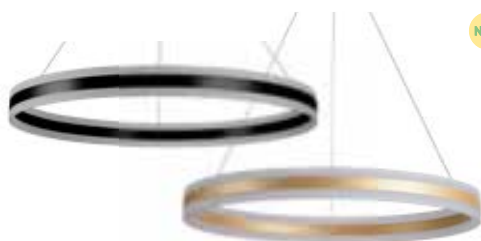

ada 100cm

ara 60 /100/150



38-39

New

40-41

42-43

New



orbit 120



compass 2m

44

45



eternity 78cm



eternity 55cm



hey-lo

contents

46



saturn

47



peri

48-49



50



51



andaman

banda

verve

52-53



54



55



laser

clip

vulcan

56



New

57



New

anna pendant

anna ceiling

58-59



60



61



swivel/andromeda

artemis/apollo pendant

honos

recessed

64-65



mini

66-67



moon recessed

68-69



polo

70-71



wall washers

72



grid



73



grid fr

74

New



slim trim 2 FR

75



slim trim adjustable

76



zelda round

New

77



slim trim IP65

78



glacier

79



sophie IP65

80



zelda round trimless

New

81



zelda square trimless

New

82



slim trimless

83



sablons

86-89



solid plaster downlights

90-91



solid wall plaster

92-94



plaster downlights

95-97



recessed IP wall lights

98-99



steplight / runway steplight

New

100-101



marker lights

track & spot

104-111



New

track heads

112-115



track accessories

New

116-117



New

ciara spot

118-121



anna spot

New

122-125



moon spot

126-127



selene

128-129



jupiter

mirror

214



acqua

wall

132-133



sunrise

New

134-135



anna wall

New

136-137



anna reader

New

138-139



pimlico 2

140-141



victoria/reader

142



laser spot

143



laser reader

144



perla

145



halkin

146



blackfriars

147



ciara wall

148



marlow

149-150



victoria LED

151



marylebone

152-153




mini projector

154



southwark

155



sloane


New

156-157



london bridge

158



vavin

159



venti/veritas

160-161



odeon

New

162



avron

163



cadet

164



concorde

165



europe

shades

176-178



shades

179



suspensions

table & floor

168-169



ciara

170-171



libra 2

172-173



olympia

outdoor

182-183



euston

184-185



plot

186



piccadilly

187



paddington

188



beaumont

189



sanderson

190-191



farringdon

192



grosvenor I

193



grosvenor II

194-195



connaught

196-197



lanesborough/savoy

198



savoy plus

199



berkeley II

200-201



strand/mayfair

203



trafalgar

204



kyoto

205



chiba duo/tokyo

206




peri

206-207



yokhama

208-209

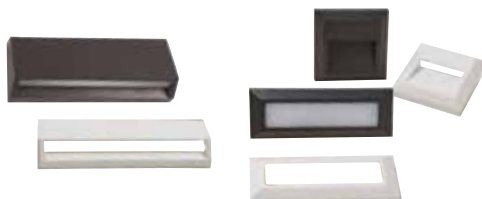

suzuka/sapporo


95-97



recessed IP wall lights

families



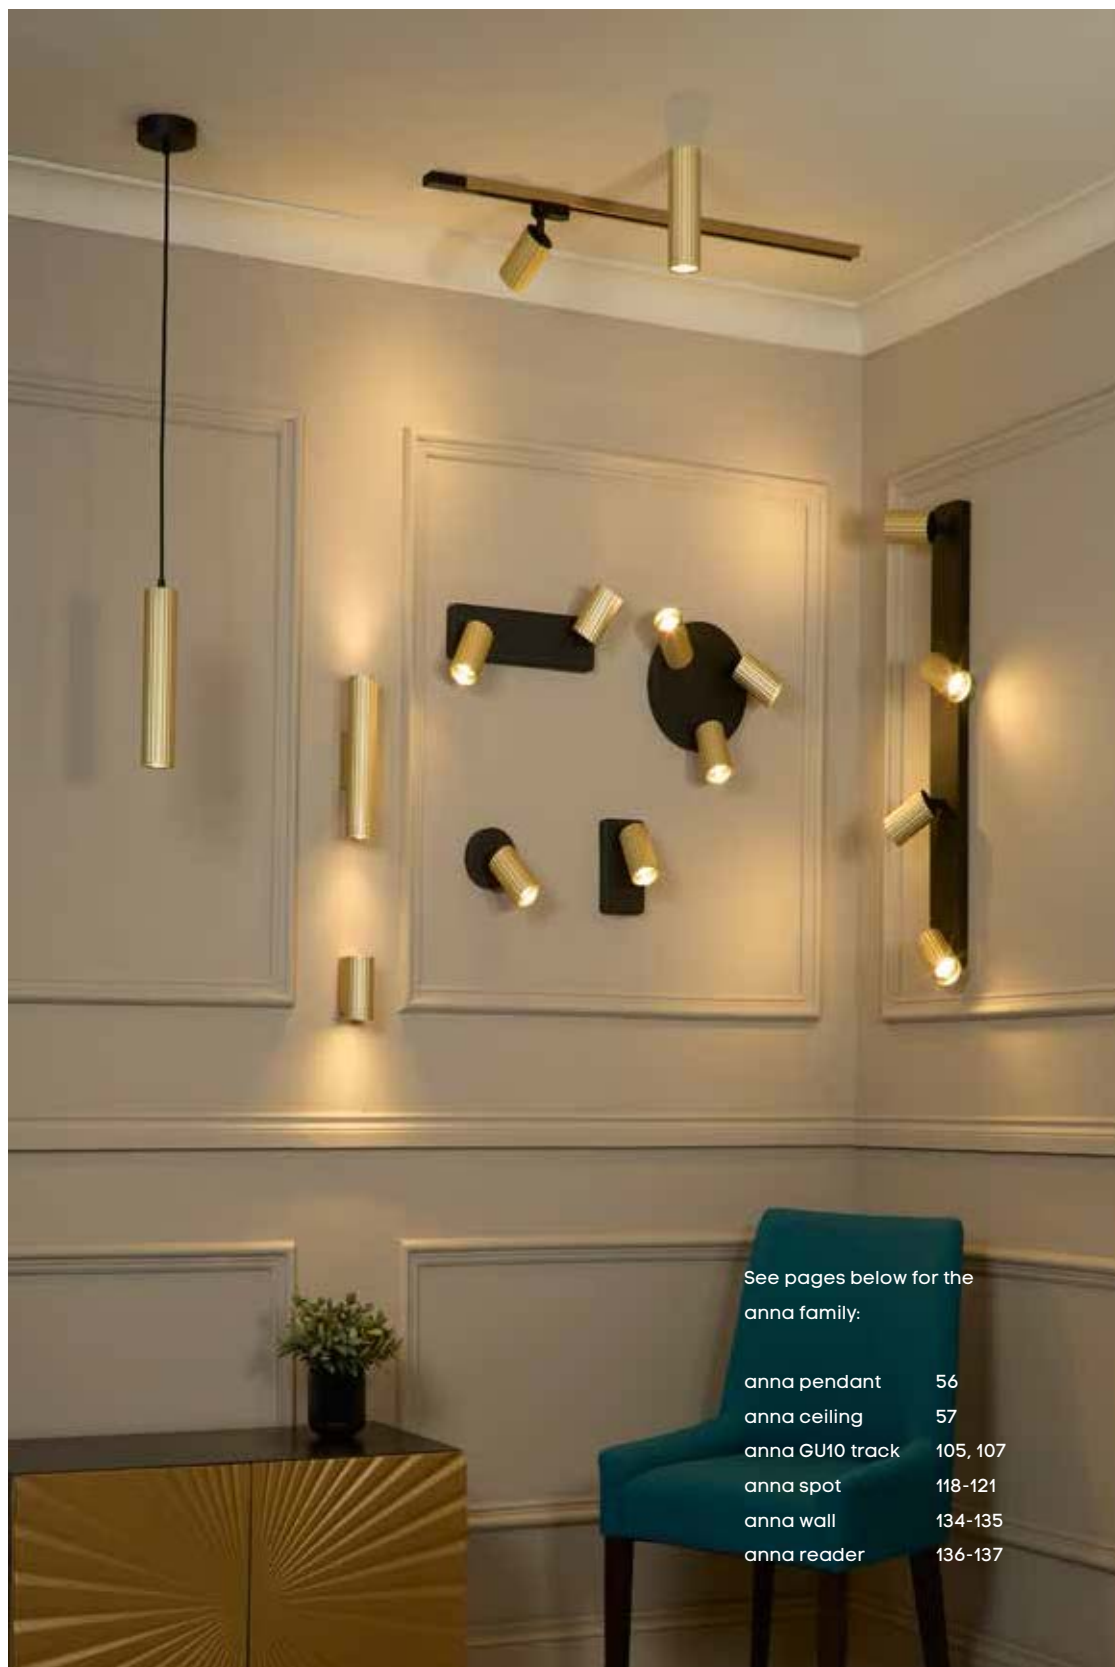

See pages below for the
anna family:

anna pendant	56
anna ceiling	57
anna GU10 track	105, 107
anna spot	118-121
anna wall	134-135
anna reader	136-137



See pages below for the ciara family:

ciara spot	116-117
ciara wall	147
ciara table and floor	168-169



See pages below for the victoria/
olympia family:

victoria	140-141
victoria LED	149-150
olympia table and floor	172-173



See pages below for the
moon family

moon recessed	66-67
moon spotlights	122-125



See pages below for the
laser family:

laser pendant	52-53
laser GU10 track	109
laser spot	142
laser reader	143



Victoria LED recessed - Pg. 150



Laser reader - Pg. 143



Ciara wall - Pg. 147



Pimlico 2 - Pg. 138-139




Victoria LED reader - Pg. 149



Victoria reader - Pg. 141



Anna reader - Pg. 137

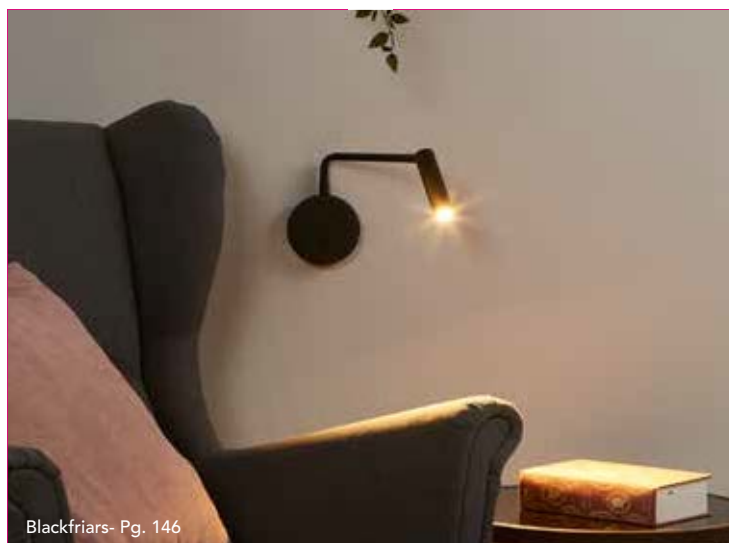


Blackfriars- Pg. 146



Marylebone - Pg. 151



Marlow - Pg. 148

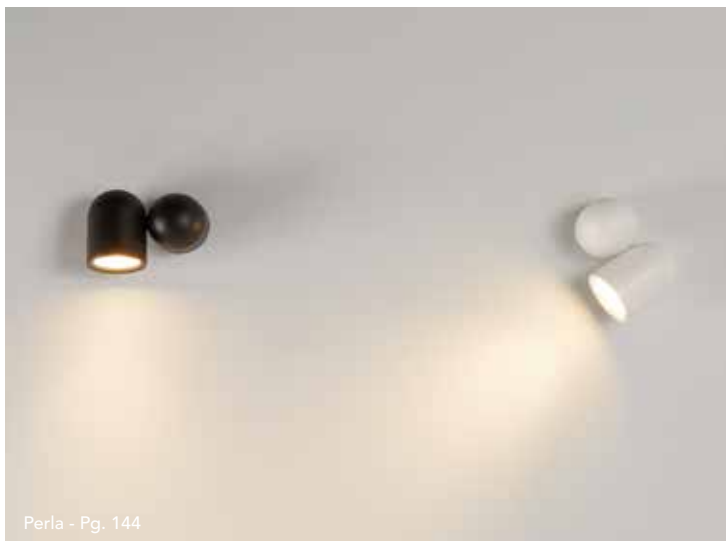

Perla - Pg. 144



For detailed drawings and specifications along
with help & advice, visit www.projectcollection.co.uk

ceiling





Item Code	Power (W)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
FL-GRA30	17	1300	1800
FL-GRA50	36	3300	3500



FL-GRA30-GO at 3000K



FL-GRA50-B at 4000K



FL-GRA30-B




FL-GRA50-GO

grace 30cm

New


FL-GRA30-B ■
FL-GRA30-GO ■



grace 50cm

New

FL-GRA50-B ■
FL-GRA50-GO ■



Key Features

Sand black / Painted gold

Metal / Rigid polystyrene

CCT Selectable 3000K / 4000K

CCT Switch inside the fitting


Replaceable LED



CE-PRI35-GO




CE-PRI45-B




CE-PRI(35/45)

+



PA-HEY-(B/W)

=



Item Code	Power (W)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
CE-PRI35	36	3600	3750
CE-PRI45	42	4300	4400

prisma 35cm

New

CE-PRI35-B ■
CE-PRI35-GO ■

prisma 45cm

New


CE-PRI45-B ■
CE-PRI45-GO ■

suspension kit 1500mm

New

PA-HEY-B ■
PA-HEY-W □

Suspension also compatible
with Hey-lo, see pg. 42-43



Key Features

Sand black / Painted gold

Die cast aluminium /

Microprismatic diffuser

CCT Selectable 3000K / 4000K

CCT Switch in backplate

Replaceable LED

CRI > 92

New




2 CCT


CE-PR145-B + PA-HEY-B



microprismatic diffuser



3000K



4000K



Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-VISTR-B	42	4300	4550
PE-VISTR-W	42	4650	4900

PE-VISTR-B



PE-VISTR-W




Transformative optic

vistina round

PE-VISTR-B ■▲

PE-VISTR-W □▲

Transformative optic
(clear when off, opaque when on)

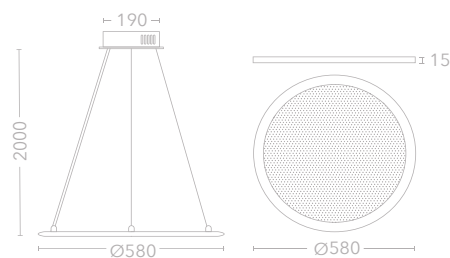

CLASS 1



DIMMABLE



2CCT

Key Features

Sand black / Sand white

Aluminium / Acrylic

Transformative optic

CCT Selectable 3000K / 4000K


CCT switch in ceiling can

60% direct, 40% indirect

Min. drop: 400mm



PE-VIST-W

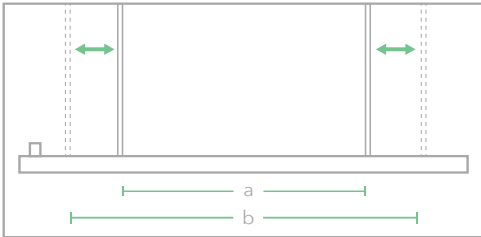


Min. suspension spacing (a) : 720mm
 Max. suspension spacing (b) : 1020mm



Adjustable suspension spacing

Item Code	Power (w)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-VIST-B	50	4750	5100
PE-VIST-W	50	5250	5700

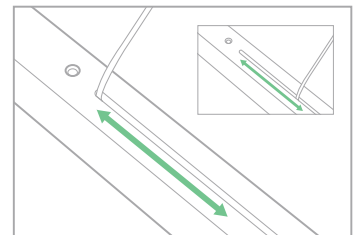



2 CCT

PE-VIST-W

vistina long


PE-VIST-B



PE-VIST-W



Transformative optic
(clear when off, opaque
when on)

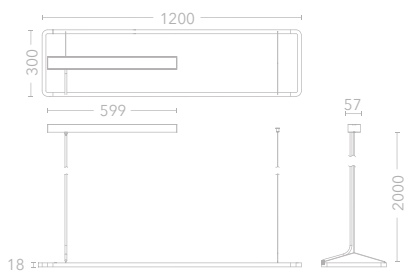

CLASS 1



DIMMABLE



2CCT

Key Features

Sand black / Sand white

Aluminium / Acrylic

Transformative optic

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

60% direct, 40% indirect

Min. drop: 300mm



CE-LINO2-B




CE-LINO2-W



CE-LINO2-B

lino 2 surface / pendant

CE-LINO2-B 
CE-LINO2-W 

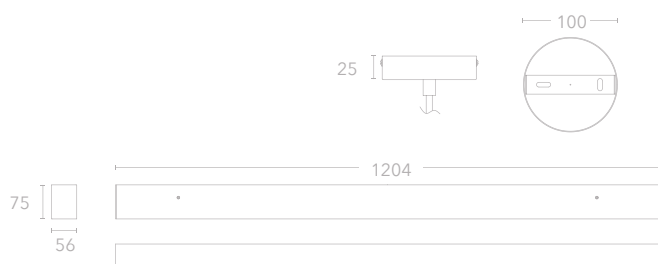

CLASS 1 DIMMABLE 2CCT

Key Features

Sand black / Sand white

Aluminium / Polycarbonate

CCT Selectable 3000K / 4000K

CCT switch inside fitting

Min. drop: 150mm

Includes surface mounting kit and
pendant suspension kit



Item Code	Power (W)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
CE-LINO2-B	37	3700	3800
CE-LINO2-W	37	3700	3800



New



2 CCT

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-ARA60-B	30	2500	2650
PE-ARA60-W	30	2800	2950
PE-ARA60-GO	30	2500	2650
PE-ARA60-BZ	30	2500	2650

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-ARA100-B	60	4300	4750
PE-ARA100-W	60	5100	5350
PE-ARA100-GO	60	4300	4750
PE-ARA100-BZ	60	4300	4750

ara 60cm

New



CLASS 1



DIMMABLE



2CCT

PE-ARA60-B
PE-ARA60-W



PE-ARA60-GO
PE-ARA60-BZ



New

Key Features


Sand black / Sand white / Painted gold / Painted bronze

Aluminium / Frosted acrylic

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

Min. drop: 400mm

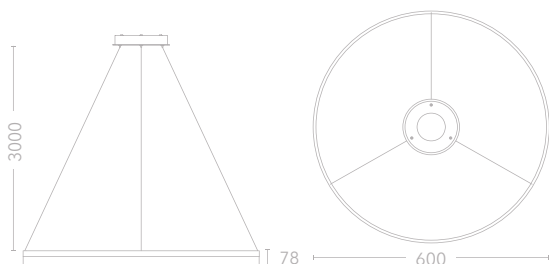



PE-ARA100-BZ



Sand black



Sand white



Gold



Bronze


ara 100cm

New

PE-ARA100-B ■
PE-ARA100-W □

PE-ARA100-GO ■
PE-ARA100-BZ ■

New

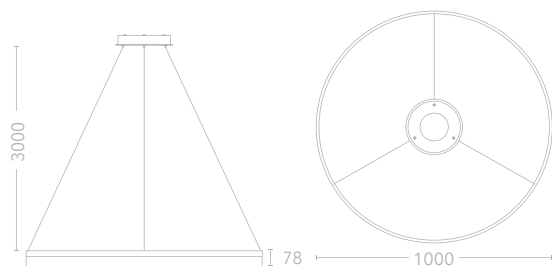

CLASS 1



DIMMABLE



2 CCT

Key Features

Sand black / Sand white / Painted gold / Painted bronze

Aluminium / Frosted acrylic

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

Min. drop: 500mm

New



2 CCT

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-ARA150-B	99	6200	6700
PE-ARA150-W	99	7800	8300
PE-ARA150-GO	99	6200	6700
PE-ARA150-BZ	99	6200	6700

ara 150cm

New

PE-ARA150-B



PE-ARA150-W




PE-ARA150-GO



PE-ARA150-BZ



New

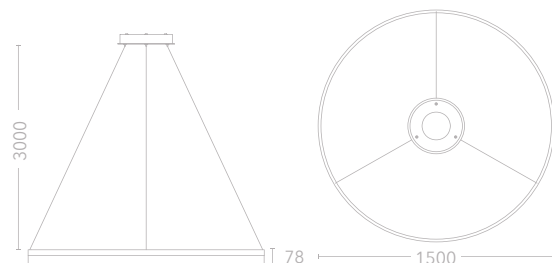

CLASS 1



DIMMABLE



2CCT

Key Features

Sand black / Sand white /


Painted gold / Painted bronze

Aluminium / Frosted acrylic

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

Min. drop: 700mm

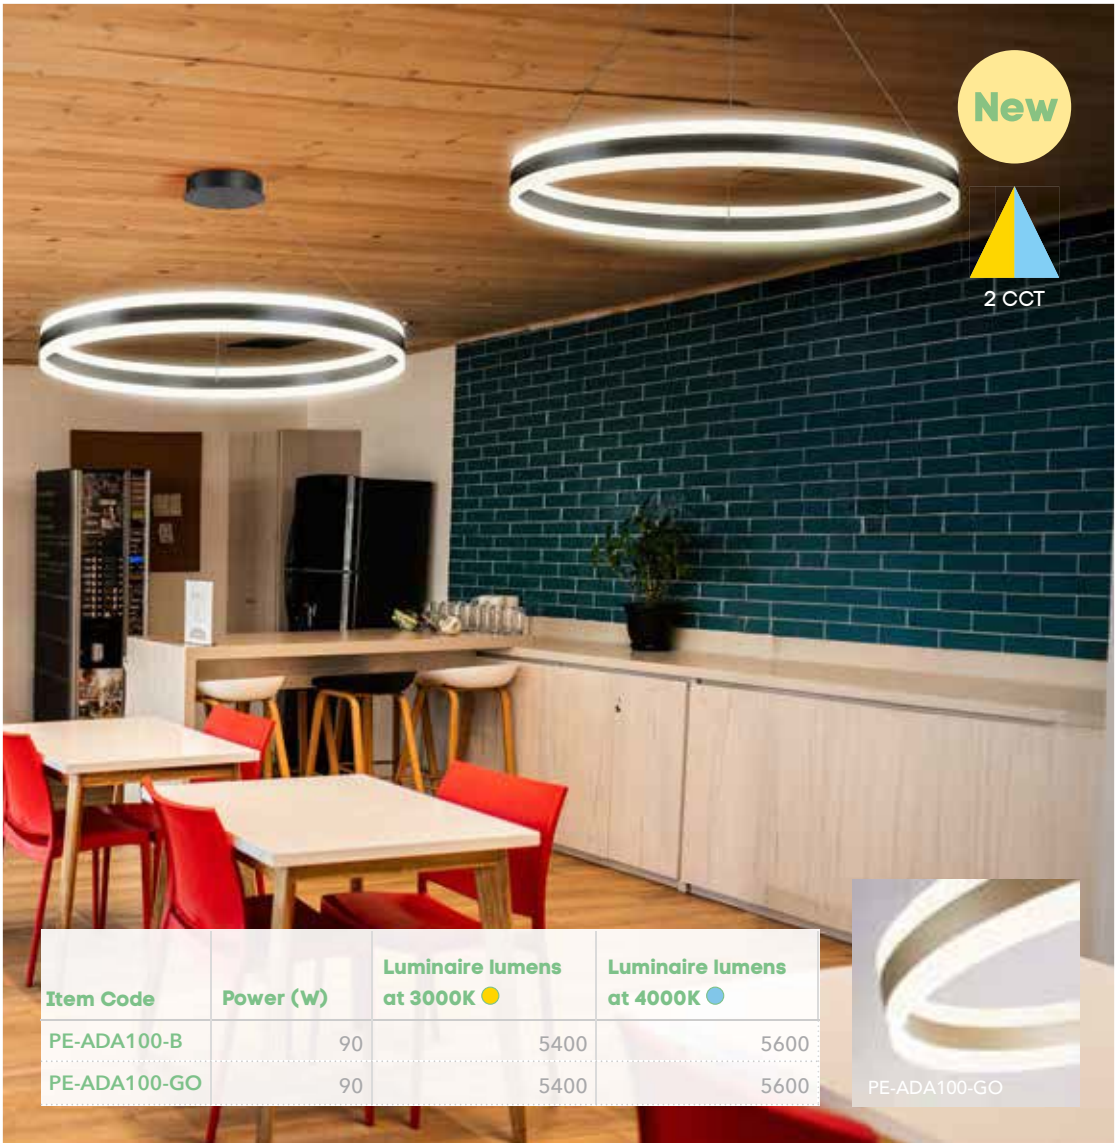


Item Code	Power (W)	Luminaire lumens	
		at 3000K ●	at 4000K ●
PE-ADA100-B	90	5400	5600
PE-ADA100-GO	90	5400	5600



ada 100cm

New

- PE-ADA100-B ■
PE-ADA100-GO ■

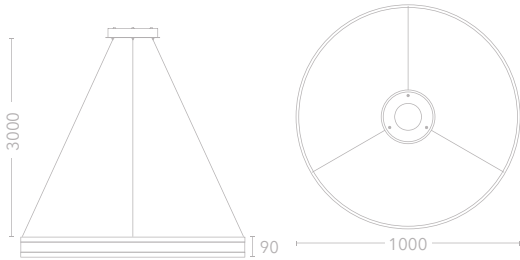

- CLASS 1 DIMMABLE 2CCT

Key Features

- Sand black / Painted gold
- Aluminium / Acrylic
- CCT Selectable 3000K / 4000K
- CCT switch in ceiling can
- Min. drop: 500mm

New



2 CCT

PE-ORB120-BZ

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-ORB120-BS	69	2950	3100
PE-ORB120-WS	69	3800	4100
PE-ORB120-GO	69	2950	3100
PE-ORB120-BZ	69	2950	3100



illuminated
inside ring



PE-ORB120-GO

orbit 120cm

New

PE-ORB120-BZ ■
PE-ORB120-WS □

PE-ORB120-GO ■
PE-ORB120-BZ ■

New



CLASS 1



DIMMABLE



2CCT

Key Features



Sand black / Sand white / Painted
gold / Painted bronze

Aluminium / Silicone diffuser

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

Min. drop: 900mm





PE-COM2-WS



PE-COM2-BS




PE-COM2-WS


Direct (downwards)
illumination

compass 2m

PE-COM2-BS 
PE-COM2-WS 



Ø2000

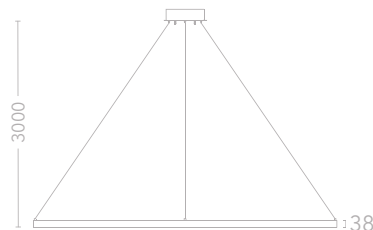

3000

38



CLASS 1 2CCT

Key Features

Sand black / Sand white

Aluminium / Opal polycarbonate

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

102W SMD LED

Min. drop: 900mm



2 CCT



Reception

PE-COM2-BS


Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-COM2-BS	102	4300	4800
PE-COM2-WS	102	5500	6000



New


2 CCT

Item Code	Power (W)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
CE-HEY60	60	7750	7850
CE-HEY90	84	10,600	10,800




CE-HEY(60/90)

+



PA-HEY-(B/W)

=

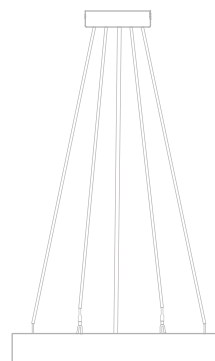

hey-lo surface 60cm

New

CE-HEY60-B ☒
CE-HEY60-W ☐

suspension kit


PA-HEY-B ☒
PA-HEY-W ☐

New

hey-lo surface 90cm

New

CE-HEY90-B ☒
CE-HEY90-W ☐



CLASS 1



DIMMABLE



2CCT

Key Features

Sand black / Sand white

Aluminium / Polycarbonate

CCT Selectable 3000K / 4000K

CCT switch in backplate

Replaceable LED

CRI>90




FL-ETE55-WS



PE-ETE78



FL-ETE55-WS

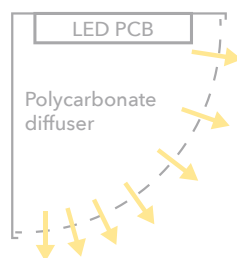


Cross section showing light distribution

eternity 78cm suspension

PE-ETE78



Luminaire lumens: 4700



CLASS 1



DIMMABLE



3000K

Key Features


Sand white

Aluminium / Polycarbonate

3000K

85W SMD LED


Min. drop: 700mm

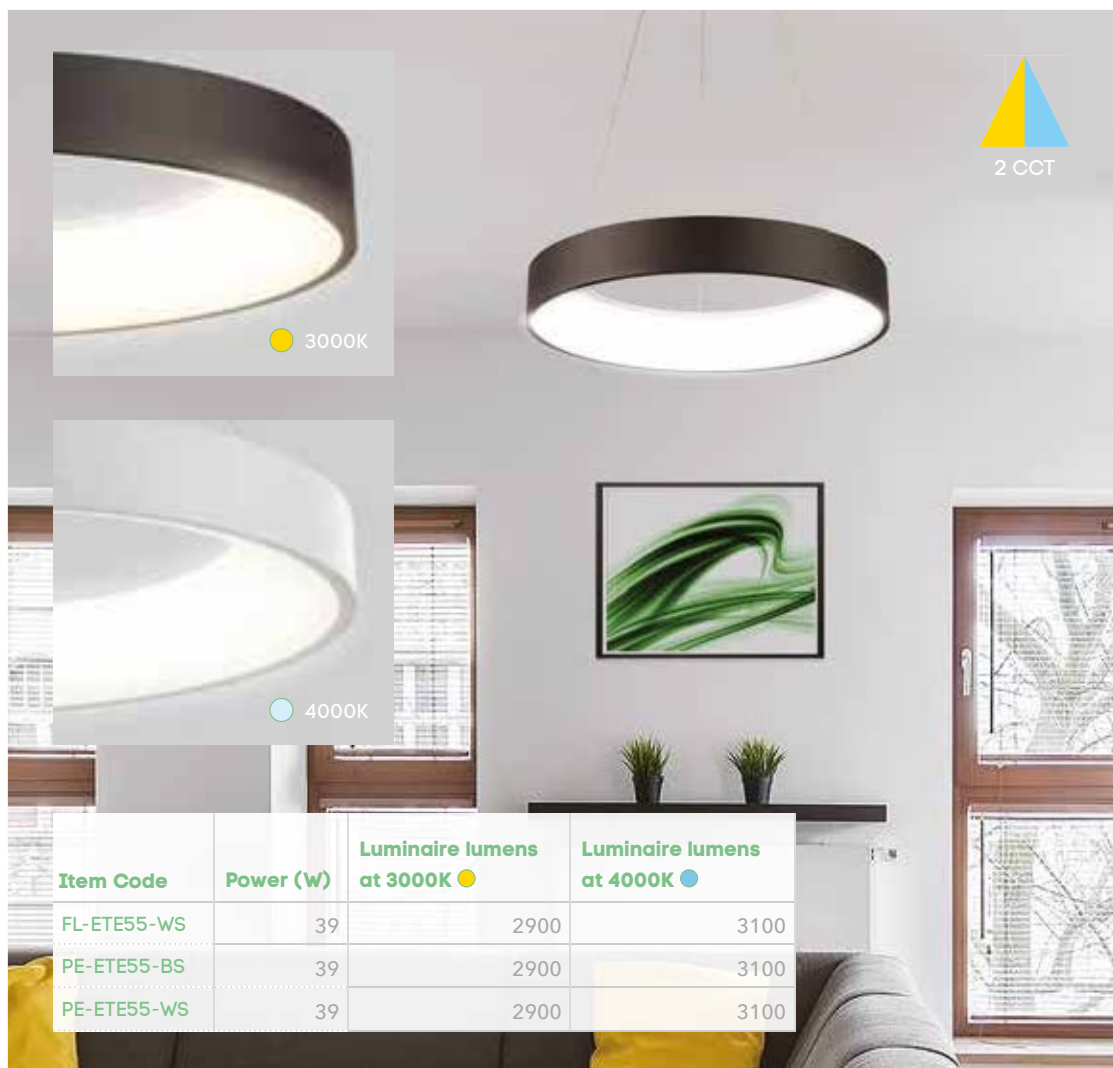

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
FL-ETE55-WS	39	2900	3100
PE-ETE55-BS	39	2900	3100
PE-ETE55-WS	39	2900	3100


eternity 55cm surface

FL-ETE55-WS ☐



eternity 55cm suspension

PE-ETE55-WS ☐
PE-ETE55-BS ☒



CLASS 1



DIMMABLE



2CCT

Key Features

Sand black / Sand white

Aluminium / Polycarbonate

CCT Selectable 3000K / 4000K

CCT switch in ceiling can


Min. drop: 450mm



Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
FL-SAT40-WS	40	3000	3100
FL-SAT60-WS	53	3600	3800


saturn 40cm

FL-SAT40-WS



saturn 60cm

FL-SAT60-WS



CLASS 1



DIMMABLE



2CCT

Key Features


Sand white

Metal / Frosted acrylic

CCT Selectable 3000K / 4000K


CCT switch in body

Ceiling or wall mounted

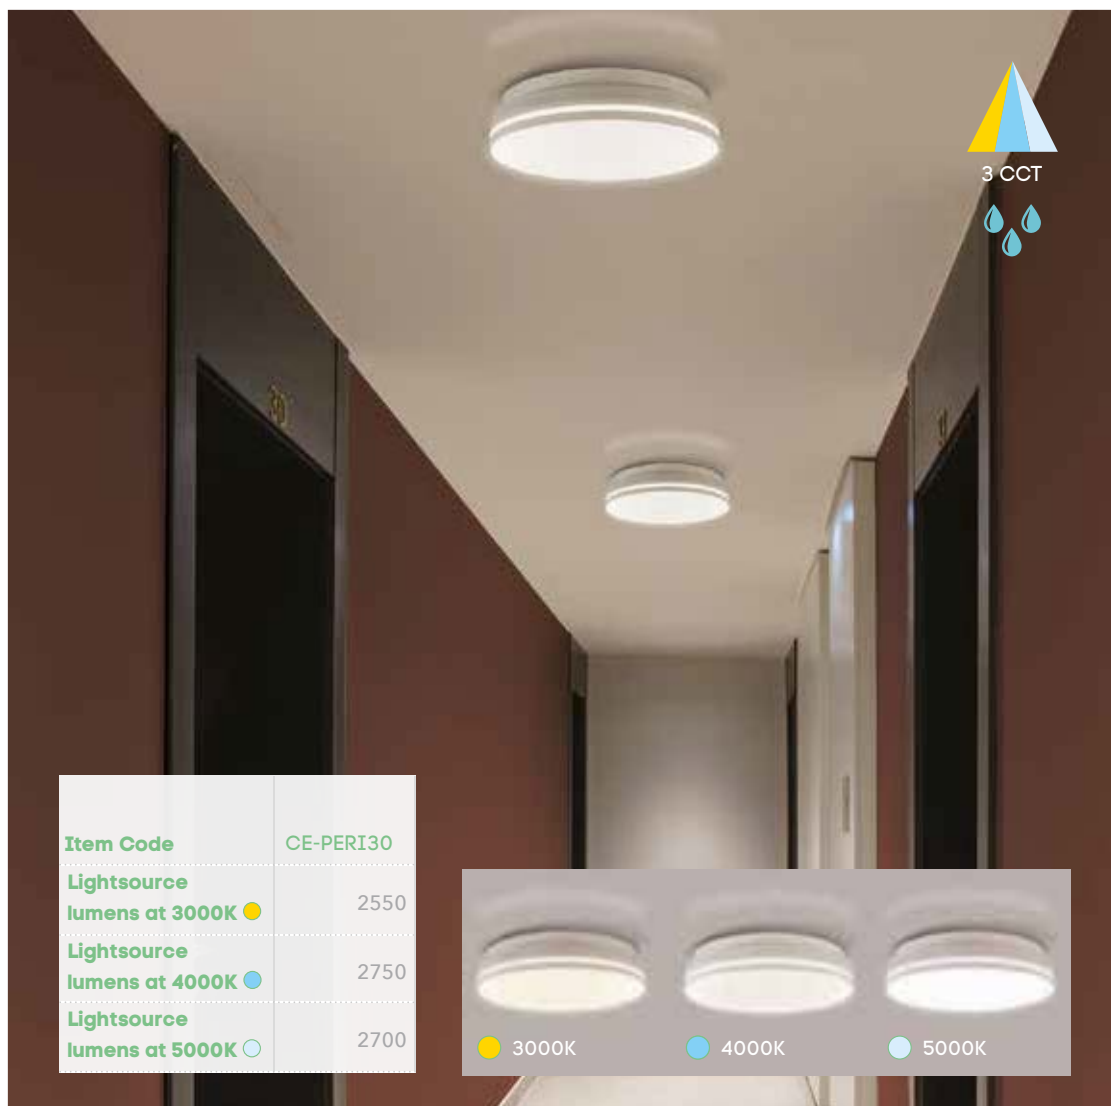

peri 30cm IP54

CE-PERI30
17W SMD LED



Key Features

- White
- Polycarbonate
- CCT Selectable
- 3000K / 4000K / 5000K
- CCT switch in body
- Suitable for outdoor use
- Replaceable LED
- Rear or side cable entry
- Ceiling or wall mounted



CE-VER40-W



CE-VER30-B



Side cable entry

verve 30cm IP44

CE-VER30-B ☒
CE-VER30-W ☐


suspension kit IP20

PA-VER-B ☒
PA-VER-W ☐

Add PA-VER to suspend from
200mm up to 2000mm

verve 40cm IP44

CE-VER40-B ☒
CE-VER40-W ☐



Key Features

Sand black / Sand white

Aluminium / PC diffuser

CRI > 88 / CCT Selectable


3000K / 4000K / 5700K

CCT switch on back of fitting


Replaceable LED lightsource

Rear and side cable entry



Ceiling or wall mounted



CE-VER(30/40)

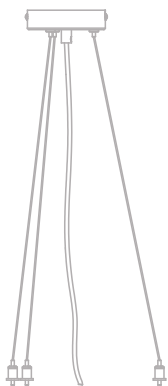

PA-VER

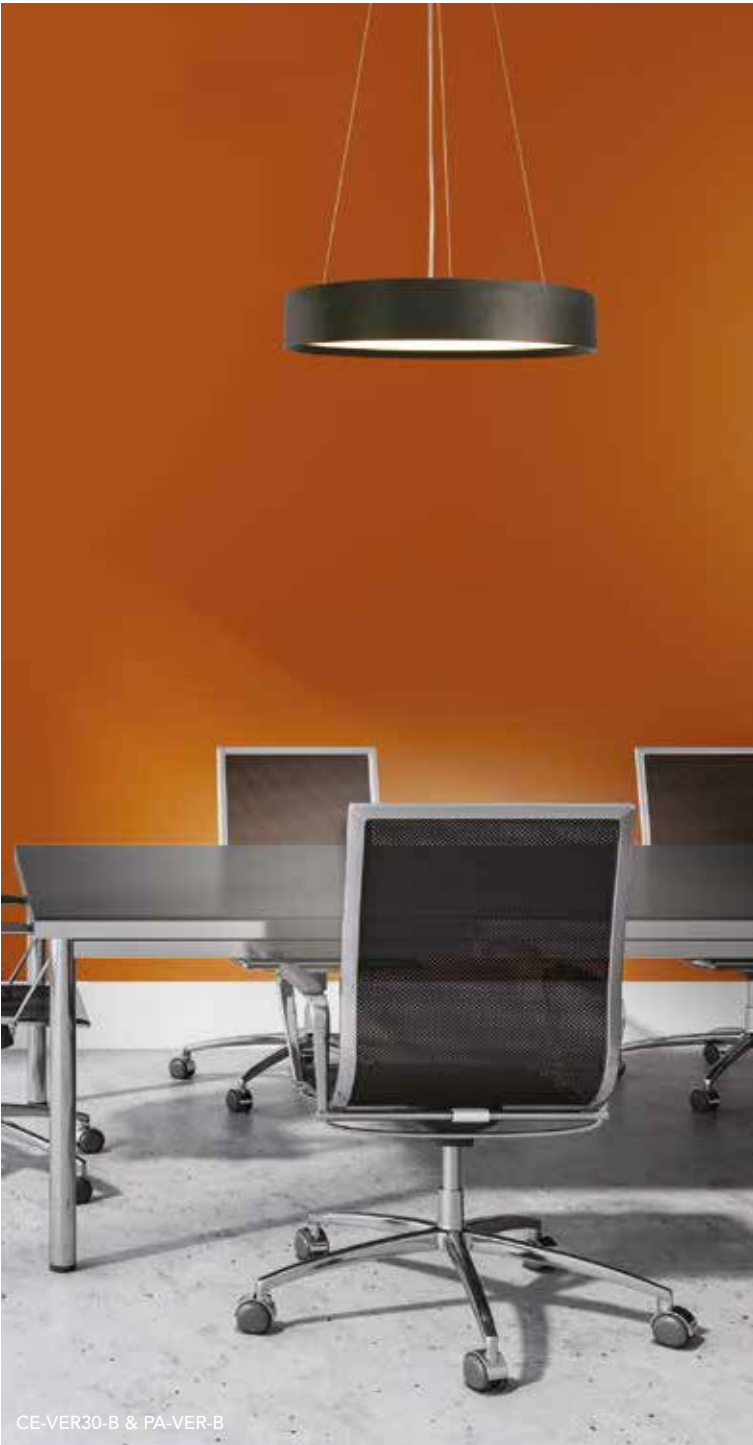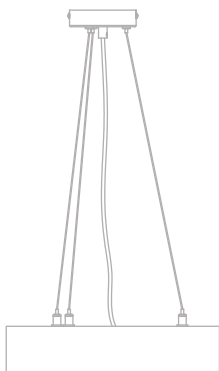


CE-VER30-B & PA-VER-B

Item Code	Power (W)	Lightsource lumens at 3000K	Lightsource lumens at 4000K	Lightsource lumens at 5700K
CE-VER30	16	2700	2850	2750
CE-VER40	23	3300	3550	3450




andaman 30cm IP44

FL-ADM30-W 
14W SMD LED
Lightsource lumens: 1100



andaman 40cm IP44

FL-ADM40-W 
25W SMD LED
Lightsource lumens: 1950



CLASS 2



DIMMABLE



3000K



IP44

Key Features

Clear glass / Matt white inner glass

Glass / Steel

3000K

Ceiling or wall mounted



FL-BAN35-B




FL-BAN23-B



FL-BAN35-B


banda 23cm IP44

FL-BAN23-B ■▲
14W SMD LED
Lightsource lumens: 950



banda 35cm IP44

FL-BAN35-B ■▲
27W SMD LED
Lightsource lumens: 1800



CLASS 2

DIMMABLE

3000K

IP44

Key Features

Matt white glass / Black

Glass / Steel

3000K

Ceiling or wall mounted



PE-LAS6-W



PE-LAS6-B



PE-LAS6-B

laser suspension


PE-LAS6-B



PE-LAS6-W



6 x GU10

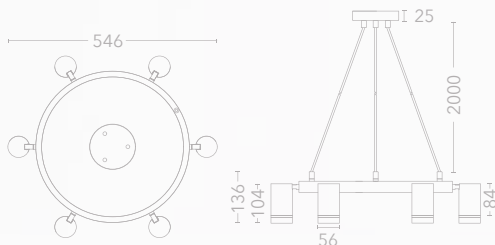

CLASS 1



ANTI-GLARE

Key Features

Sand black / Sand white

Aluminium / Frosted diffuser

GU10 max. 10W LED only

Min. drop: 500mm

90° pivot, 350° rotation

Heads independently
adjustable



See pages below for the rest
of the laser family:

laser GU10 track	109
laser spot	142
laser reader	143



PE-CLIP



PE-CLIP




clip

PE-CLIP



Luminaire lumens: 2650

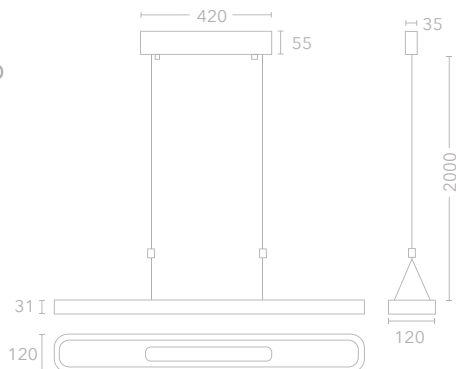

CLASS 1



DIMMABLE



3000K

Key Features

Sand white

Aluminium / Frosted acrylic

3000K

43W SMD LED

Min. drop: 350mm



AM-VUL2



AM-VUL4



AM-VUL2



AM-VUL4

vulcan 2ft

AM-VUL2



18W SMD LED

Luminaire lumens: 1700

vulcan 4ft

AM-VUL4



36W SMD LED

Luminaire lumens: 3000




CLASS 2



3000K

Key Features

Aluminium body / Opal
polycarbonate diffuser / White
end caps
3000K
Ceiling or wall mounted

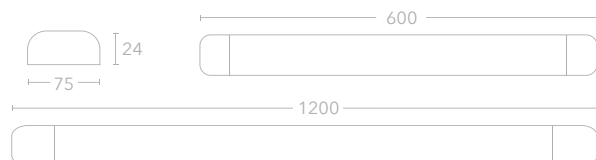



PE-ANN-B

PE-ANN-W



PE-ANN-GO



PE-ANN-BZ




anna pendant

New

- PE-ANN-B
- PE-ANN-W
- PE-ANN-GO
- PE-ANN-BZ



Compatible with
pendant track adapter



CLASS 1



DIMMABLE



TRACK
ADAPTER

Key Features

Sand black / Sand white /
Anodised gold* / Anodised
bronze*

Aluminium

GU10 LED only, max. 10W

Max. drop: 2m

*Living finishes

New



CE-ANN-B

CE-ANN-W


CE-ANN-GO

CE-ANN-BZ

anna ceiling

New

- CE-ANN-B
- CE-ANN-W
- CE-ANN-GO
- CE-ANN-BZ



CLASS 1



DIMMABLE

Key Features

Sand black / Sand white /
Anodised gold* / Anodised
bronze*

Aluminium

GU10 LED only, max. 10W

*Living finishes



CE-AND-B



CE-SWI-W



andromeda ceiling



ANTI-GLARE


CE-AND-B



CE-AND-W



90° pivot, 350° rotation



swivel


CE-SWI-B



CE-SWI-W



Simultaneous 90°
pivot and rotation



CLASS 2



DIMMABLE

Key Features

Sand black / Sand white


Aluminium

GU10 LED only, max. 10W




artemis GU10 pendant

PE-ART-B
PE-ART-W

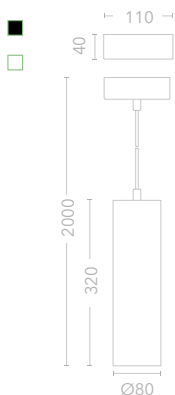

apollo GU10 pendant

PE-APO-B
PE-APO-W



CLASS 1



DIMMABLE



TRACK
ADAPTER

Key Features

Sand black / Sand white

Steel

GU10 max. 10W LED only

Min. drop: 200mm

Compatible with pendant track
adapter



Compatible with
pendant track adapter



CE-HONRB



CE-HONSQB



CE-HONRW



CE-HONSQW

honos round adjustable

CE-HONRB ■
CE-HONRW □
1 x GU10

honos square adjustable

CE-HONSQB ■▲
CE-HONSQW □▲
1 x GU10



CLASS 2



DIMMABLE



Key Features

Sand black / Sand white

Aluminium

GU10 max. 10W LED only

20° pivot, 360° rotation





recessed





Size comparison:
PL-SLIMW (left) vs PL-MINW (right)
See pg. 82 for PL-SLIMW



See pg. 219 for Mini GU10 lamp,
available in 2700K, 3000K and
4000K

**What is a
mini GU10?**





DL-MINW



PL-MINW


PL-MINW

mini

DL-MINW



CUT OUT 50mm
MIN DEPTH 115mm




mini trimless

PL-MINW



CUT OUT 50mm
MIN DEPTH 115mm

Ceiling must be skimmed
after installation



CLASS 2



DIMMABLE



ANTI-GLARE

Key Features

Sand white

Aluminium

Mini GU10 lamp (MR11)

max. 5W, LED only

30° tilt, 360° rotation

Distance to front of lamp: 30mm




See Pg. 122-125 for
the rest of the Moon
product range



moon recessed

SP-MOOR-B ■
SP-MOOR-W □



Key Features

Sand white or Sand black

GU10 LED only, Max. 10W

350° Rotation

90° Pivot

Ideal for retrofit : Suitable for
installation into downlight holes
from Ø60 to Ø85mm





PL-POLW



DL-POLW



PL-POLW



polo


DL-POLW



CUT OUT
92mm



MIN DEPTH
135mm



polo trimless

PL-POLW




CUT OUT
92mm



MIN DEPTH
135mm

Ceiling must be skimmed
after installation



CLASS 2



DIMMABLE

Key Features

Sand white

Aluminium

GU10 Max. 10W LED only

90° pivot, 350° rotation

Use in any position from fully


recessed to fully extended

Distance to front of lamp : 12mm



GU10 wall washer

DL-WWW

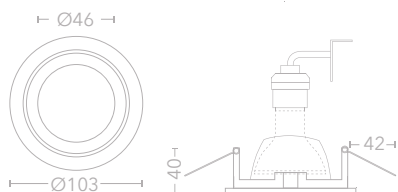

CLASS 2



DIMMABLE

Key Features

Matt white

Die cast aluminium

GU10 Max. 10W LED only

60° tilt



DL-WASH



DL-WASH



LED wall washer

DL-WASH




Luminaire lumens: 650



CUT OUT
76mm



MIN DEPTH
100mm



CLASS 2



DIMMABLE



3000K

Key Features

Sand white

Aluminium

3000K

9W COB LED

40° tilt, 350° rotation


Mains dimmable driver included

Tilt angle locked by screw if required




grid 1

DL-GRID1WW 
 DL-GRID1WB 
 DL-GRID1BB 



grid 2

DL-GRID2WW 
 DL-GRID2WB 
 DL-GRID2BB 



Key Features

Matt white / Matt white & black /
 Matt black

Aluminium

GU10 Max. 10W LED only

15° tilt, 360° rotation

Distance to front of lamp: 30mm



DL-GRID2FRWB 🔥



DL-GRID2FRWB 🔥



DL-GRID2FRWB 🔥



DL-GRID1FRWW 🔥

grid 1 FR 🔥


DL-GRID1FRWW ☐
DL-GRID1FRWB ☒ ▲



CUT OUT
90x95mm



MIN DEPTH
130mm

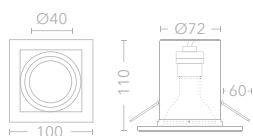

grid 2 FR 🔥

DL-GRID2FRWW ☐
DL-GRID2FRWB ☒ ▲
DL-GRID2FRBB ☒ ■



CUT OUT
95x171mm



MIN DEPTH
130mm



CLASS 1



DIMMABLE



FIRE-RATED
30/60/90

Key Features

Matt white / Matt white & black /
Matt black

Steel

GU10 Max. 10W LED only

15° tilt, 360° rotation

Distance to front of lamp: 30mm

Tested in 30, 60 and 90 minute

ceilings

New



DL-SLIM2FRW 🔥



DL-SLIM2FRB 🔥



Quick fit terminals for easy installation

slim trim 2 FR, adjustable 🔥

New

DL-SLIM2FRB




DL-SLIM2FRW



CUT OUT
80mm



MIN DEPTH
140mm



CLASS 2



DIMMABLE



FIRE-RATED
30/60/90

Key Features

Sand white / Sand black

Steel & Glass

GU10 LED only, Max. 10W

30° tilt

Quick-fit connectors

Lamp change from the front

Distance to front of lamp: 35mm



DL-SLIMW



DL-SLIMB

DL-SLIMW



DL-SLIMSQW



DL-SLIMSQB


DL-SLIMSQW

slim trim adjustable

DL-SLIMB ■
DL-SLIMW □



CUT OUT 84mm
MIN DEPTH 145mm




slim trim square adjustable

DL-SLIMSQB ■▲
DL-SLIMSQW □▲



CUT OUT 84 x 84mm
MIN DEPTH 135mm



CLASS 2 DIMMABLE

Key Features

Matt black / Matt white

Aluminium

GU10 Max. 10W LED only

45° tilt


Distance to front of lamp: 32mm



zelda round IP65 FR 💧🔥

New

DL-ZELRB
DL-ZELRW

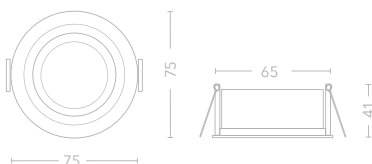

Quick fit terminals for easy installation

CLASS 2	DIMMABLE	IP65	FIRE-RATED 30/60/90

Key Features

Sand white / Sand black

Steel & Glass

GU10 LED only, Max. 10W

Quick-fit connectors

Lamp change from the front

Suitable for bathroom zones 1 & 2

Distance to front of lamp: 20mm



DL-SLIMIPW



DL-SLIMIPB

DL-SLIMIPW

slim trim IP65

DL-SLIMIPB





DL-SLIMIPW



CUT OUT
70mm



MIN DEPTH
135mm



Quick fit terminals for
easy installation



CLASS 2



DIMMABLE



IP65

Key Features

Matt black / Matt white

Aluminium

GU10 LED only, Max. 10W

Lamp change from the front,
mounting sleeve remains in the
ceiling

Distance to front of lamp: 27mm




glacier round IP65

DL-GLAR



CUT OUT
70mm

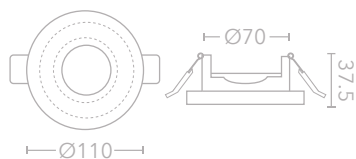

CLASS 2



DIMMABLE



IP65

Key Features

Acrylic & Polished chrome

GU10 LED only, Max. 10W



DL-SOPWB




DL-SOPWB



DL-SOPWB

sophie
IP65

DL-SOPWB

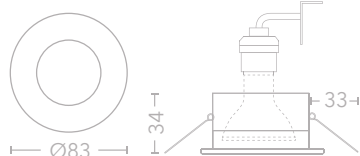

Quick fit terminals for
easy installation



CLASS 2



DIMMABLE



IP65

Key Features

Matt white

GU10 LED only, Max. 10W

Suitable for indoor or
outdoor use


Quick fit connectors

Comes with both black and white
covers in the box


Distance to front of lamp: 6mm



PL-ZELRW 🔥



PL-ZELRW 🔥



PL-ZELRB 🔥



PL-ZELRB 🔥

zelda trimless round IP65 FR 🔥💧

New

PL-ZELRB





PL-ZELRW



CUT OUT
78mm



MIN DEPTH
135mm



Quick fit terminals for
easy installation



CLASS 2



DIMMABLE



IP65



FIRE-RATED
30/60/90

Key Features

Sand white or Sand black

Steel & Glass

GU10 LED only, Max. 10W

Quick-fit connectors

Lamp change from the front

Suitable for bathroom zones 1 & 2

Distance to front of lamp: 45 mm



PL-ZELSQW 🔥



PL-ZELSQW 🔥



PL-ZELSQB 🔥



PL-ZELSQB 🔥

zelda trimless square IP65 FR 🔥💧

New

PL-ZELSQB




PL-ZELSQW



CUT OUT
80x80mm



MIN DEPTH
135mm



126



80

95

80

55



Quick fit terminals for easy installation



CLASS 2



DIMMABLE



IP65



FIRE-RATED
30/60/90

Key Features

Sand white or Sand black

Steel & Glass

GU10 LED only / Max. 10W

Quick-fit connectors

Lamp change from the front

Suitable for bathroom zones 1 & 2

Distance to front of lamp: 45 mm

recessed



PL-SLIMW



PL-SLIMIPW



PL-SLIMIPB



PL-SLIMW



PL-SLIMB

slim trimless IP65

PL-SLIMIPB




PL-SLIMIPW



CUT OUT
85mm



MIN DEPTH
140mm



slim trimless adjustable

PL-SLIMB



PL-SLIMW




20° tilt



CUT OUT
80mm



MIN DEPTH
140mm



CLASS 2



DIMMABLE



ANTI-GLARE

Key Features

Sand white / Sand black


Aluminium

GU10 Max. 10W LED only

Quick fit connectors


Ceiling must be skimmed after
installation

Distance to front of lamp: 30mm

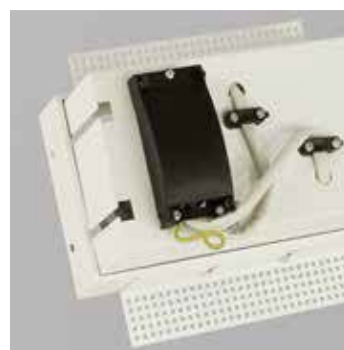


sablons 1 trimless

PL-SAB1-B  
PL-SAB1-W  



sablons 2 trimless

PL-SAB2-B  
PL-SAB2-W  



Key Features

Sand black / Sand white

Aluminium

GU10 Max. 10W LED only

45° gimbal

Ceiling must be skimmed after
installation


Distance to front of lamp: 17mm

Use solid plaster trimless lighting...

when you have an already plastered wall or ceiling, and you're not planning to skim the surface again.

After the product installed it is a decorator's job to infill the gap with a flexible filler / caulk, sand to a smooth finish and paint the surface of the ceiling, including the interior of the fitting.

installing solid plaster trimless lighting

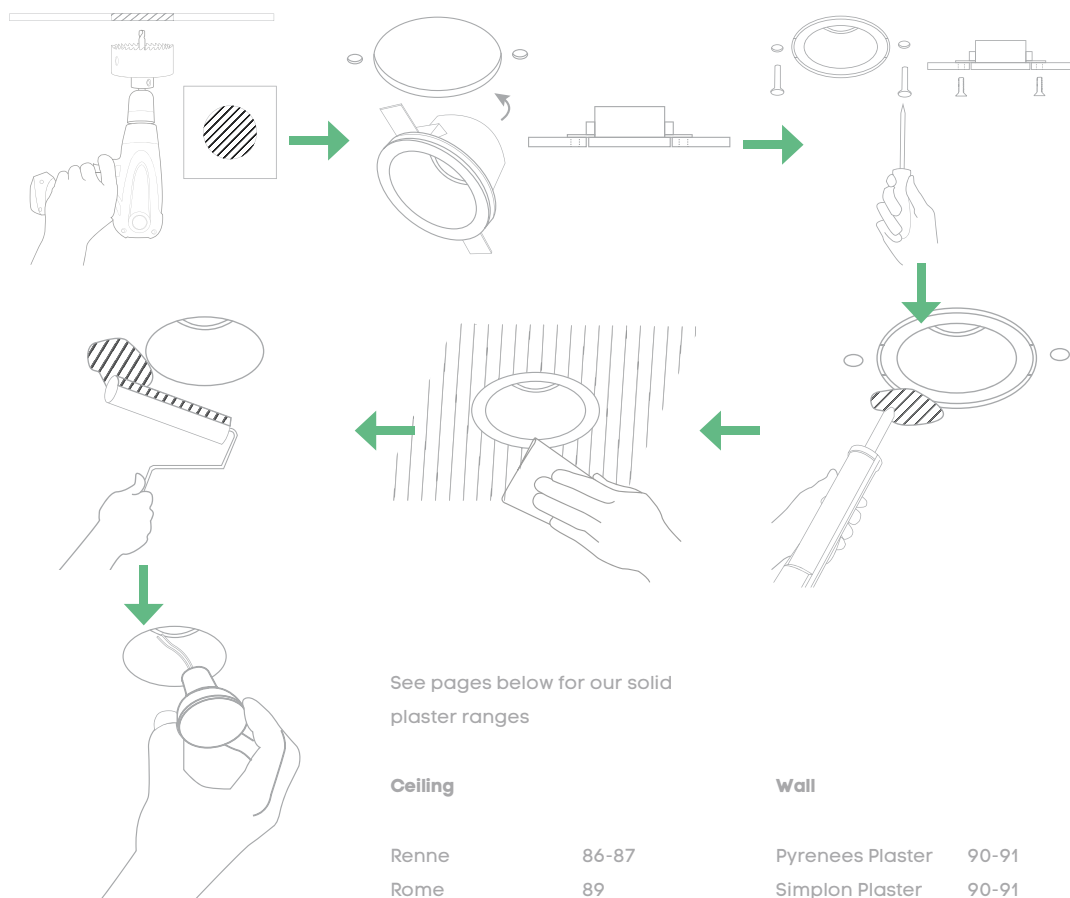


Use metal trimless lighting...

when you are installing into a wall or ceiling that has yet to be skimmed, or will be reskimmed.

After the metal frame is installed in the wall or ceiling the plasterer skims the surface with a 3mm layer of plaster skim. The frames have a 3mm lip for the plasterer to skim up to.

installing metal frame trimless lighting

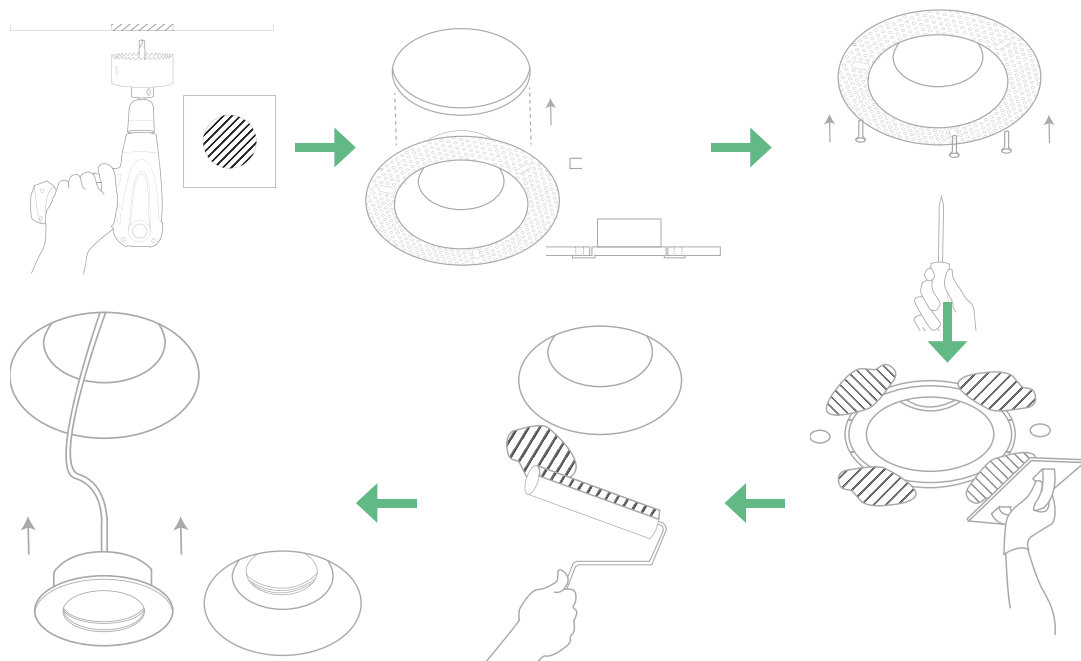

See pages below for our metal frame trimless ranges

Ceiling

Mini plaster	65
Polo plaster	69
Zelda trimless	80-81
Slim trimless	82
Sablons	83

Wall

Boulogne LED	92-93
Blanche LED	92-93
Blanche GU10	94



BEFORE INSTALLATION



AFTER INSTALLATION



PL-REN1



PL-REN1




Retaining clip

renne

PL-REN1



CUT OUT
120x120mm



CLASS 1



DIMMABLE



PAINTABLE

Key Features

White plaster

GU10, max. 10W LED only

How to fit guide - see website

If skimming the ceiling, complete this before installing



This symbol represents a white plaster finish



PL-RENWW



PL-REN2




PL-RENWW

renne twin

PL-REN2



CUT OUT
118x191mm




renne wall washer

PL-RENWW



CUT OUT
126x123mm



Key Features

White plaster

GU10, max. 10W LED only

Anti-glare

How to fit guide - see website

If skimming the ceiling, complete this before installing



This symbol represents a white plaster finish



PL-ROM1 / PL-ROM2




PL-ROM2

rome

PL-ROM1



CUT OUT
136x136mm




rome 2

PL-ROM2



CUT OUT
136x252mm



Key Features

White plaster

GU10, max. 10W LED only



Adjustable tabs for varying ceiling thicknesses

How to fit guide - see website

If skimming the ceiling, complete this before installing



This symbol represents a white plaster finish

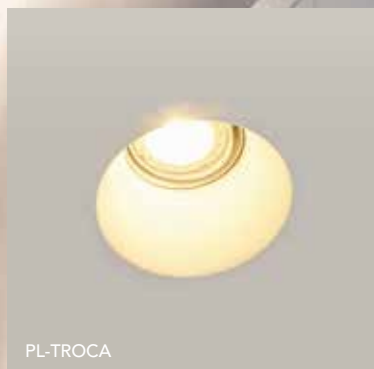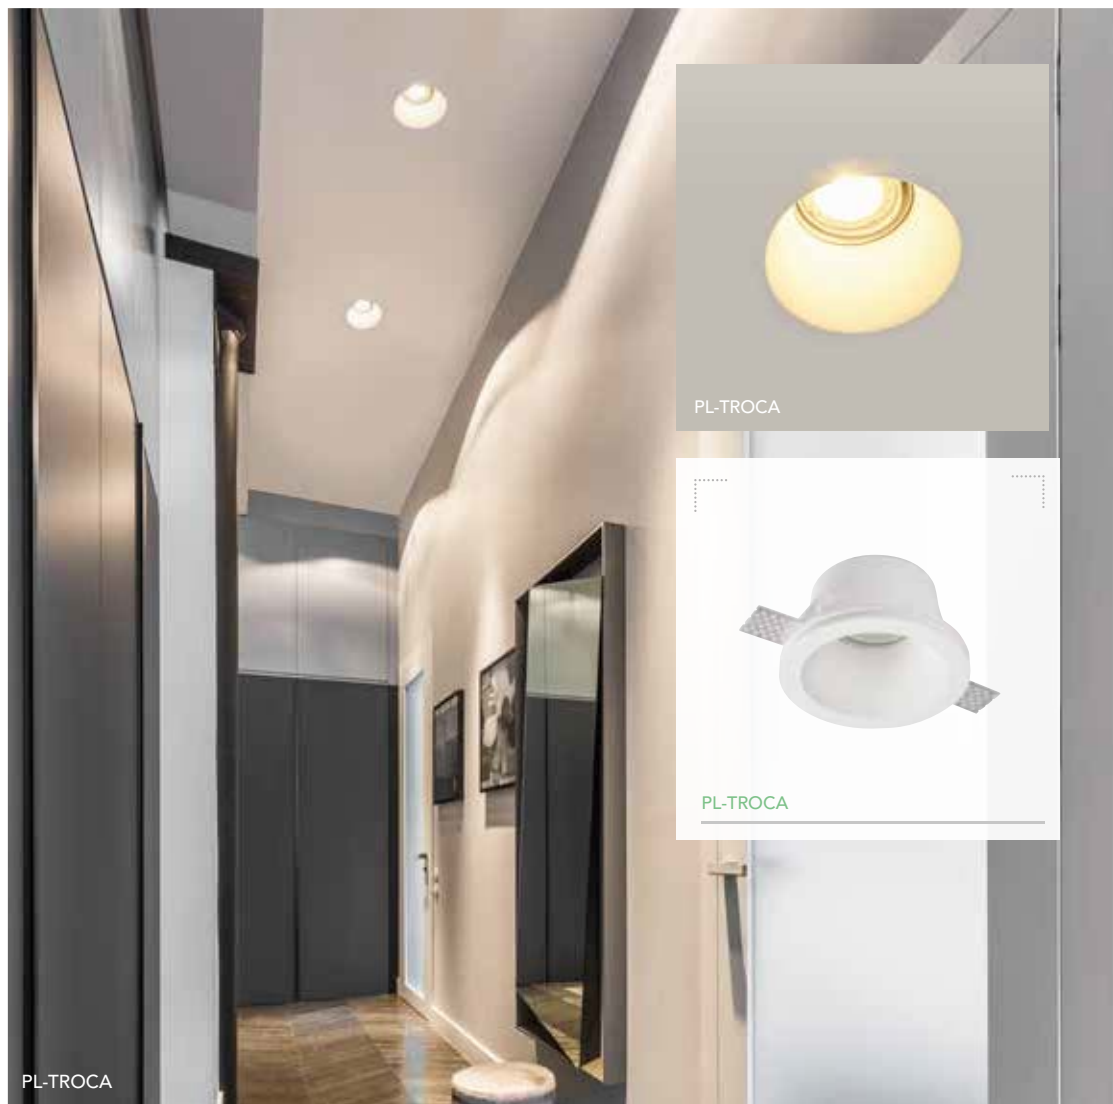

PL-TROCA



PL-TROCA

trocadero adjustable


PL-TROCA



Tilt angle: 40°



CUT OUT
158mm



CLASS 1



DIMMABLE



PAINTABLE



ANTI-GLARE

Key Features

White plaster


GU10, max. 10W LED only

How to fit guide - see website

If skimming the ceiling, complete this before installing



This symbol represents a white plaster finish

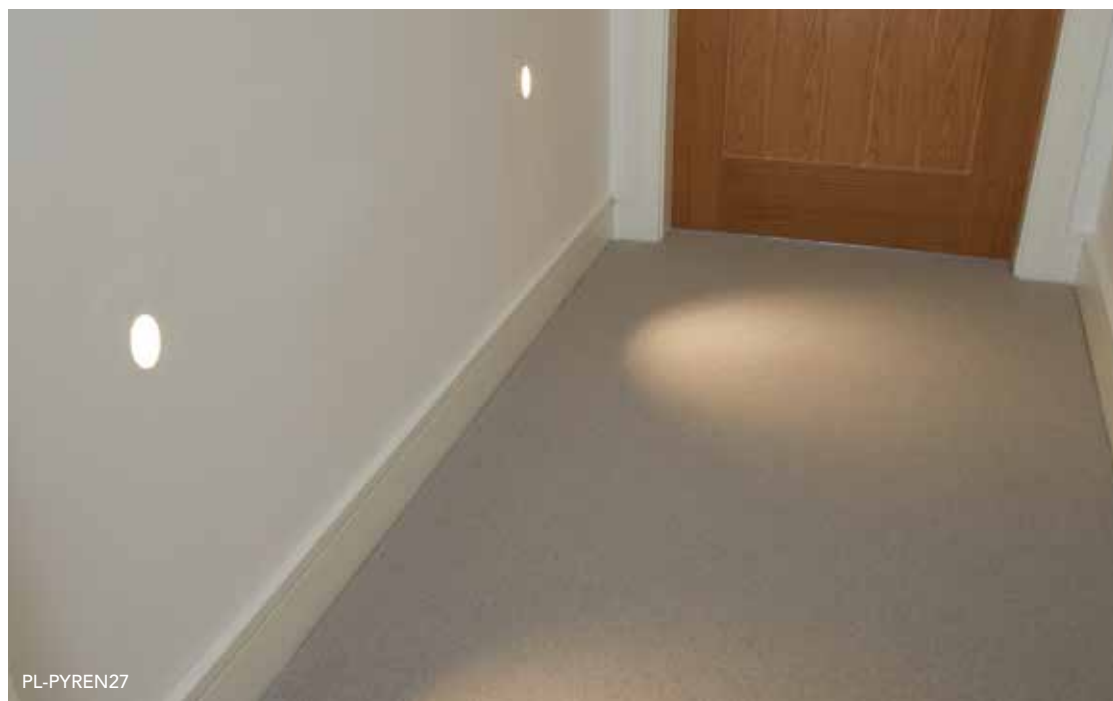

pyrenees plaster

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-PYREN ▲	☐ White plaster	350mA	3000K	60	Dimmable*	MOD1W
PL-PYREN27 ▲	☐ White plaster	350mA	2700K	60	Dimmable*	MOD1W2700

simplon plaster


Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-SIMPL ▲	☐ White plaster	350mA	3000K	60	Dimmable*	MOD1W
PL-SIMPL27 ▲	☐ White plaster	350mA	2700K	60	Dimmable*	MOD1W2700

* Dimmable when used with a dimmable driver




pyrenees plaster

1W CREE XPE Power LED
95 lumens / 30° beam angle



simplon plaster

1W CREE XPE Power LED
95 lumens / 30° beam angle



Key Features

- White plaster
- Driver supplied separately, p. 219
- Dimmable when used with a dimmable driver
- Not suitable for use in solid walls
- How to fit guide - see website
- If skimming the wall, complete this before installing
- Suitable for plasterboard thickness 9-15mm





boulogne LED

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replacement LED module
PL-BOU	☐ White plaster	350mA	3000K ●	60	Dimmable*	MOD1W
PL-BOU27 ▲	☐ White plaster	350mA	2700K ●	60	Dimmable*	MOD1W2700

blanche LED


Item no.	Finish	Power	CCT	Lumens	Dimmable	Replacement LED module
PL-BLA	☐ White plaster	350mA	3000K ●	60	Dimmable*	MOD1W
PL-BLA27 ▲	☐ White plaster	350mA	2700K ●	60	Dimmable*	MOD1W2700

*Dimmable when used with a dimmable driver

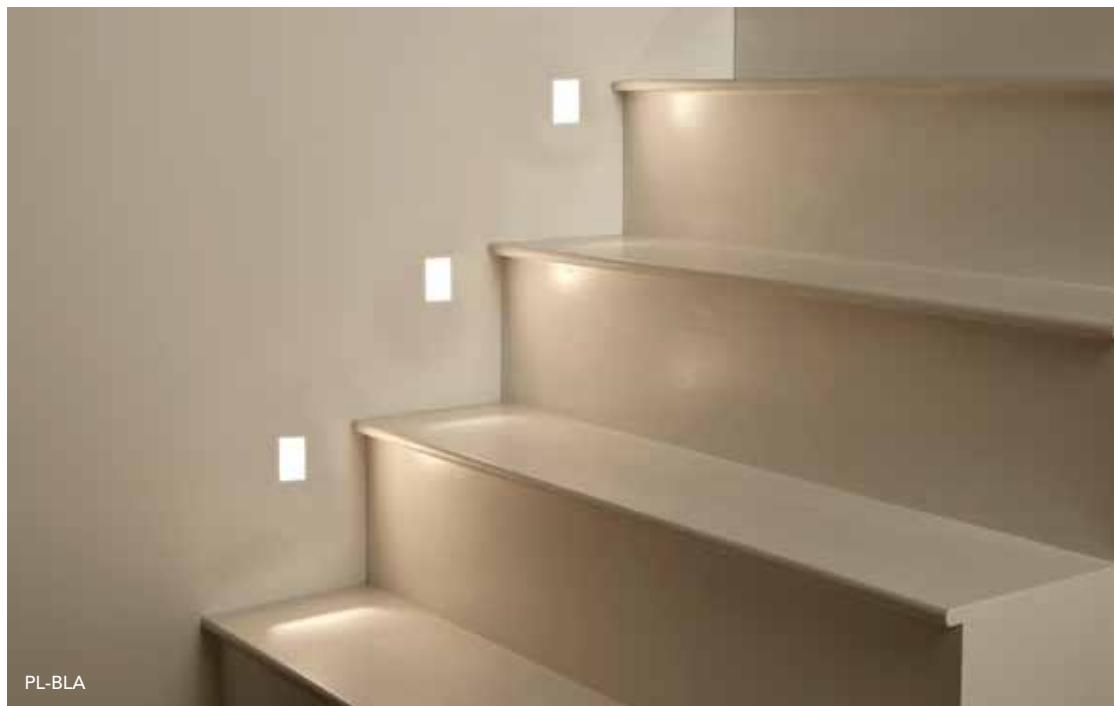


boulogne LED

1W CREE XPE Power LED
95 lumens / 30° beam angle



blanche LED

1W CREE XPE Power LED
95 lumens / 30° beam angle




Key Features

- Matt white / Steel
- Driver supplied separately, p. 219
- Dimmable when used with a dimmable driver
- Not suitable for use in solid walls
- Wall must be skimmed after installation



blanche GU10

PL-BLAGU10



Key Features

Matt white

Steel

1 x GU10, Max.10W LED only

Not suitable for use in solid walls

Wall must be skimmed after
installation



recessed

IPR-WSLW

IPR-WSLB

Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimmable	Replacement LED module	Class
IPR-WSLB	Black	350mA	3000K	45	65	Yes*	MOD1WIP	III
IPR-WSLB-AC	Black	220 - 240V**	3000K	45	65	No	MOD1WIP230V	I
IPR-WSLB27	Black	350mA	2700K	45	65	Yes*	MOD1WIP-2700	III
IPR-WSLB27-AC	Black	220 - 240V**	2700K	45	65	No	MOD1WIP230V-2700	I
IPR-WSLW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WSLW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WSLW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WSLW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I


*Dimmable when used with a dimmable driver

** Integrated Driver

simplon IP65

1W CREE XPE Power LED

95 lumens / 30° beam angle

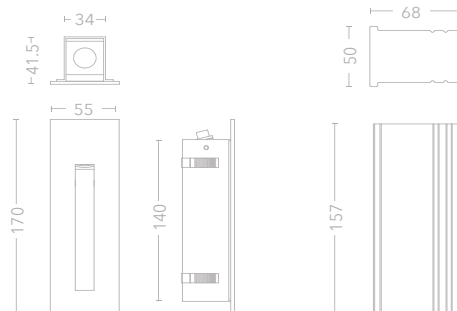

IP65

Key Features

Sand white / Sand black

Aluminium

Mounting box included for 350mA solid wall applications only



IPR-WRW

IPR-WRB

Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimmable	Replacement LED module	Class
IPR-WRB	Black	350mA	3000K	50	65	Yes*	MOD1WIP	III
IPR-WRB-AC	Black	220 - 240V**	3000K	50	65	No	MOD1WIP230V	I
IPR-WRB27	Black	350mA	2700K	50	65	Yes*	MOD1WIP-2700	III
IPR-WRB27-AC	Black	220 - 240V**	2700K	50	65	No	MOD1WIP230V-2700	I
IPR-WRW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WRW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WRW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WRW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I

*Dimmable when used with a dimmable driver

** Integrated Driver


pyrenees IP65

1W CREE XPE Power LED

95 lumens / 30° beam angle



CUT OUT
60mm

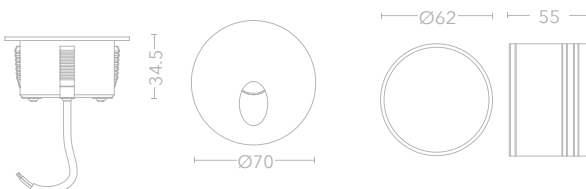

IP65

Key Features

Sand white / Sand black

Aluminium

Mounting sleeve included for solid wall applications



New



RW-STP-W




RW-STP-B



RW-STP-GO



RW-STP-GO

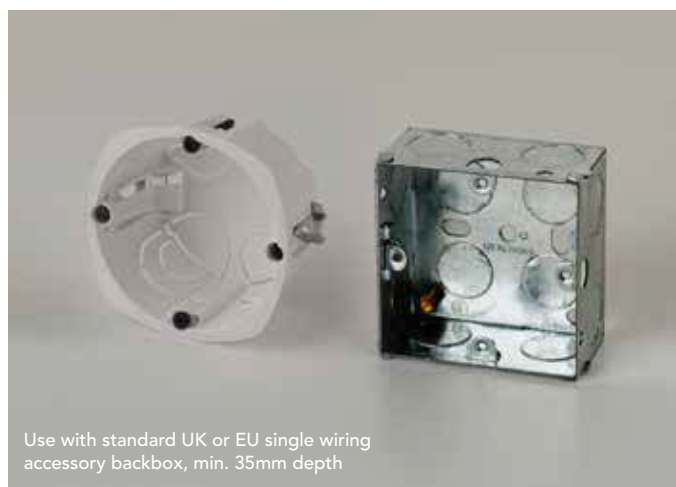

Use with standard UK or EU single wiring accessory backbox, min. 35mm depth

steplight

New

RW-STP-B



RW-STP-W



RW-STP-GO



CLASS 2



3000K

Key Features

Matt black / White / Gold

Plastic


3000K

1.5W SMD LED

80 lumens

Use with standard UK or EU single wiring accessory backbox, min.

35mm depth



New

RW-RUN-GO



RW-RUN-B



RW-RUN-GO



RW-RUN-W

runway steplight

New

RW-RUN-B



RW-RUN-W



RW-RUN-GO



CLASS 2



3000K



SENSOR

Key Features

Matt black / White / Gold

Plastic


3000K

1.5W SMD LED

80 lumens

Use with standard UK or EU single wiring accessory backbox, min.

35mm depth



lights up for
30 seconds




holborn IP65

IPR-HOLSS



1W CREE XPE Power LED
90 lumens / 120° beam angle



hoxton IP65


IPR-HOXSS



IPR-HOXCP



1W CREE XPE Power LED
90 lumens / 120° beam angle



CLASS 3



DIMMABLE



IP65



350mA

Key Features

Polished chrome / Satin stainless
steel 316 / Aluminium body
3000K

Very shallow profile

Driver supplied separately,
see pg. 219

Fittings must be wired in series



IPR-HOLSS

holborn anti glare IP65




IPR-HOLSSAG



CUT OUT
38mm



IPR-HOLSSAG



CLASS 3



DIMMABLE



IP65



350mA

Key Features

Satin stainless steel 316

1W CREE XPE / 3000K

25 lumens / Beam angle: 120°

Very shallow profile

Driver supplied separately,
see pg. 219

Fittings must be wired in series

diana IP44


DL-DIA-W



CUT OUT
38mm



DL-DIA-W



CLASS 3



DIMMABLE



IP44



350mA

Key Features

Sand white finish / Die cast body

1W Olsen LED / 3000K

95 lumens / Beam angle: 30°

Driver supplied separately,
see pg. 219

Fittings must be wired in series



For detailed drawings and specifications along
with help & advice, visit www.projectcollection.co.uk

track & spot



New





TR-ANN-BZ



TR-ANN-GO



TR-ORI2-BZ

anna GU10 track spot

New

TR-ANN-GO
TR-ANN-BZ



orion 2 GU10 track spot

New

TR-ORI2-GO
TR-ORI2-BZ





CLASS 2



DIMMABLE

Key Features

- Anodised gold / Anodised bronze
- Aluminium
- Living finishes
- GU10 LED only, max. 10W
- 350° Rotation / 90° Pivot





TR-ORI2-B



TR-ORI2-W

orion 2 GU10 track spot



TR-ORI2-B



TR-ORI2-W



CLASS 2



DIMMABLE


Key Features

Sand Black / Sand White

Aluminium

GU10 LED only, max. 10W

350° Rotation / 90° Pivot





TR-ANN-B



TR-ANN-W


anna GU10 track spot



TR-ANN-B



TR-ANN-W



CLASS 2



DIMMABLE

Key Features

Sand Black / Sand White

Aluminium

GU10 LED only, max. 10W

350° Rotation / 90° Pivot



TR-LIB-WW




TR-LIB-B

libra GU10 track spot

TR-LIB-B



TR-LIB-WW



CLASS 2



DIMMABLE

Key Features

Sand black / Sand white

Aluminium

GU10 LED only, max. 10W

350° Rotation / 90° Pivot



TR-LAS-W




TR-LAS-B

laser GU10 track spot

TR-LAS-B



TR-LAS-W



See pages below for the rest
of the laser family:

laser pendant	50-51
laser reader	143
laser spot	144



CLASS 2



DIMMABLE

Key Features

Sand black / Sand white

Aluminium

GU10 LED only, max. 10W

350° Rotation / 90° Pivot

On/Off switch on track connector




TR-AND-W



TR-AND-B

andromeda GU10 track spot

TR-AND-B 
TR-AND-W 

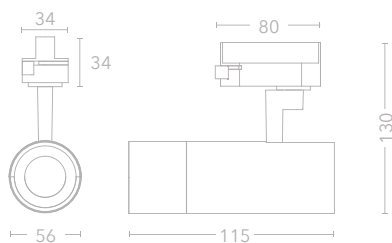

CLASS 2



DIMMABLE

Key Features

Sand white / Sand black

Aluminium

GU10 LED only, max. 10W

350° Rotation / 90° Pivot

Suitable for use with longer lamp
lengths



CCT and power switches within body



TR-TAU-W

TR-TAU-B

taurus LED track spot

TR-TAU-B




TR-TAU-W



1350 lumens at 4000K, 15W

1150 lumens at 3000K, 15W

Taurus is supplied with a default setting of 3000K, 15W

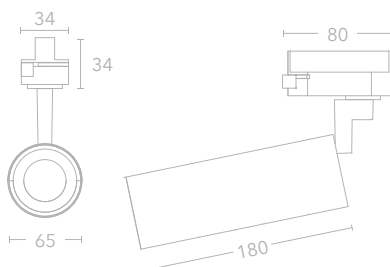

CLASS 2



2 CCT

Key Features

Sand white / Sand black

Power selectable 10W, 12W, 15W


CCT selectable 3000K / 4000K

Switches located in body of fitting, see image above

350° Rotation / 90° Pivot


CRI>90

Add a pendant to your track...

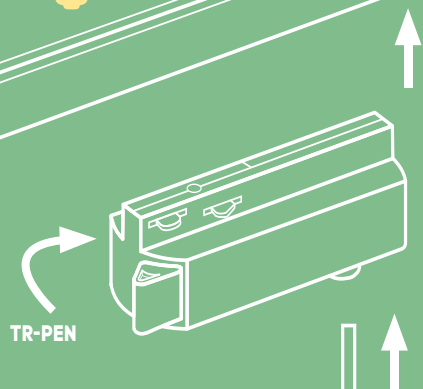

Pick your pendant here



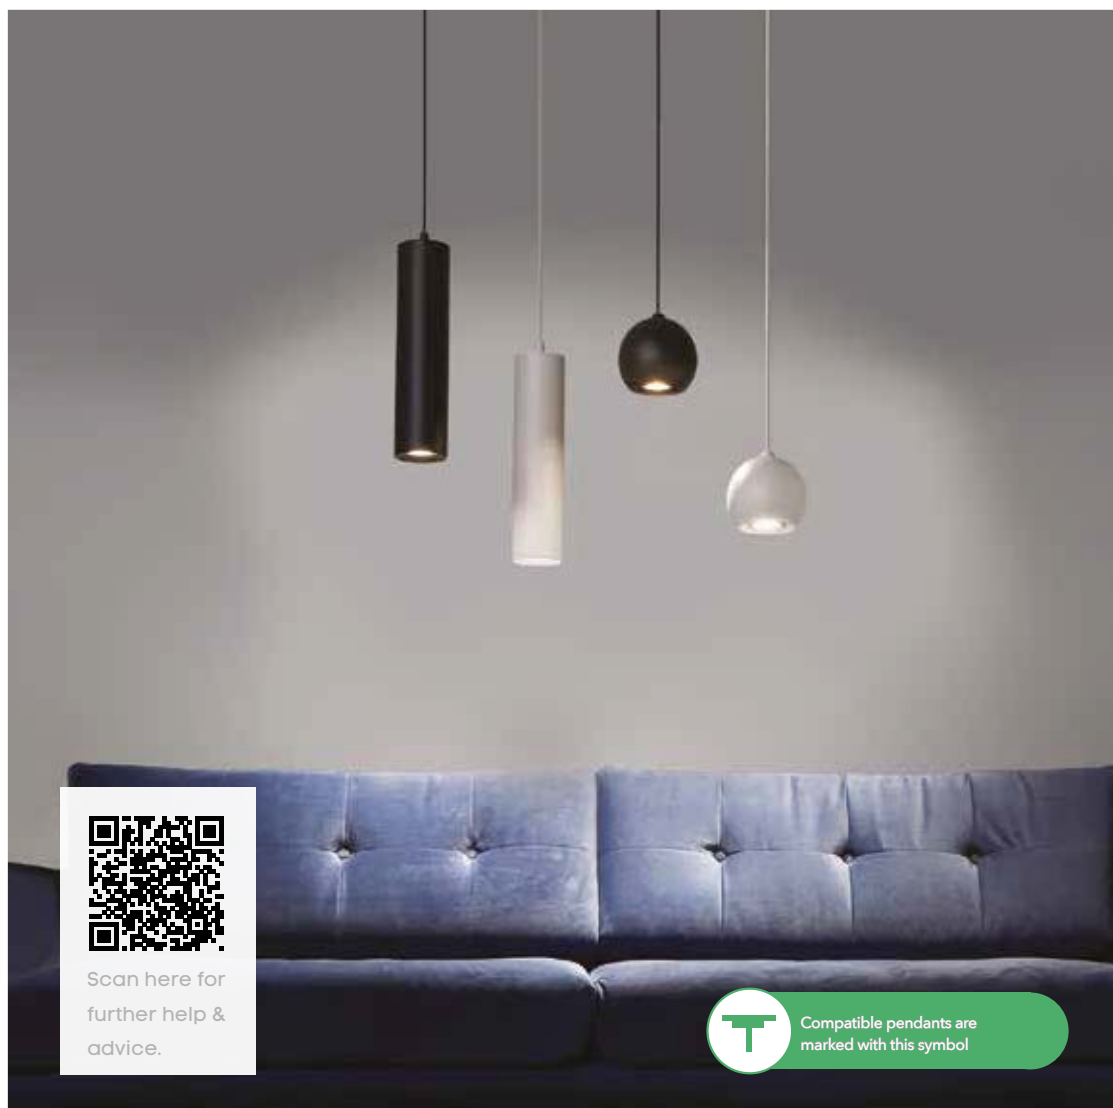

Scan here for
further help &
advice.



Compatible pendants are
marked with this symbol

pendant track adapter


TR-PEN-B



TR-PEN-W



Use with any mains voltage
pendant that takes a replaceable
lamp. Must be under 2kg and
suspended by a single power cable.



TR-PEN-B



CLASS 1



DIMMABLE



230 VOLTS

Key Features


Pendant requirements:

1. Suspended by a single power cable
2. Maximum 2kg weight
3. Takes a replaceable 230V lamp (bulb)



Compatible
pendants are marked
with this symbol

track lengths

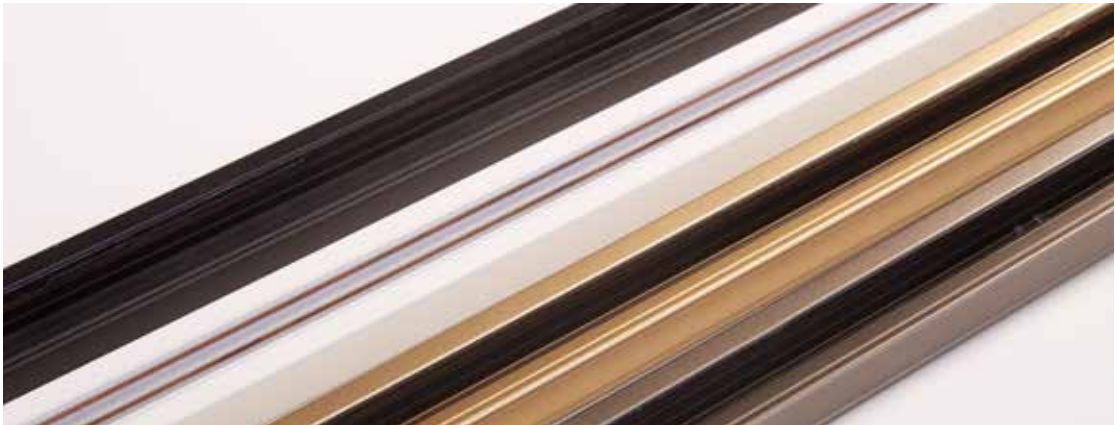

1m track only

TR-T1-B	■
TR-T1-W	□
TR-T1-GO	■
TR-T1-BZ	■

2m track only

TR-T2-B	■
TR-T2-W	□
TR-T2-GO	■
TR-T2-BZ	■

track kits



TR-1B / TR-1W / TR-1GO / TR-1BZ

1m track kit

TR-1B	■
TR-1W	□
TR-1GO	■
TR-1BZ	■

Includes live end & end cap
L1000 x W35 x H18mm

2m track kit

TR-2B	■
TR-2W	□
TR-2GO	■
TR-2BZ	■

Includes live end & end cap
L2000 x W35 x H18mm

 CLASS 1

 DIMMABLE

 230 VOLTS

Key Features

Extensive range of track
& connectors

Ideal for applications where
fittings need to be moved or
added

Earth on the neutral side

Track can be cut to any length



accessories

Item	Finishes
① Live end 	■ TR-LE-B / □ TR-LE-W
② End cap	■ TR-EC-B / □ TR-EC-W
③ Mini-joiner	■ TR-MJ-B / □ TR-MJ-W
④ X-Connector 	■ TR-XC-B / □ TR-XC-W
⑤ L-Connector 	■ TR-LC-B / □ TR-LC-W
⑥ T-Connector 	■ TR-TC-B / □ TR-TC-W
⑦ 3m suspension	■ TR-LE-B / □ TR-LE-W (longer suspensions available on request)
⑧ Centre Connector 	■ TR-CC-B / □ TR-CC-W
⑨ Flexible Connector 	■ TR-FC-B / □ TR-FC-W
⑩ Pendant Adapter 	■ TR-PEN-B / □ TR-PEN-W

 Accessories with this symbol can be used as a power feed in.

New



ciara 1

New


SP-CIA1-GO



SP-CIA1-BZ



1 x mini GU10 LED



See pg. 219 for Mini GU10 lamps,
available in 2700K, 3000K and
4000K



CLASS 1



DIMMABLE

Key Features

Anodised gold & Sand black /

Anodised bronze & Painted bronze

Aluminium

Living finishes

Mini GU10 lamp (MR11)

max. 5W, LED only

350° rotation, 90° pivot


Ceiling / Wall mounted



ciara 3

New


SP-CIA3-GO
SP-CIA3-BZ
3 x mini GU10 LED



ciara 4

New

SP-CIA4-GO
SP-CIA4-BZ
4 x mini GU10 LED



Key Features

- Anodised gold & Sand black /
- Anodised bronze & Painted bronze
- Aluminium
- Living finishes
- Mini GU10 lamp (MR11)
- max. 5W, LED only
- 350° rotation, 90° pivot
- Ceiling / Wall mounted

New



1. SP-ANN2-GO, 2. SP-ANN3-GO, 3. SP-ANN1-GO, 4. SP-ANN4-GO



1. SP-ANN2-BZ, 2. SP-ANN3-BZ, 3. SP-ANN1-BZ, 4. SP-ANN4-BZ



SP-ANN1-BZ



SP-ANN1-GO



Anodised bronze with painted bronze backplate



Anodised gold with black backplate


anna 1



SP-ANN1-GO

SP-ANN1-BZ

1 x GU10 LED



CLASS 1



DIMMABLE

Key Features

Anodised gold & Sand black
/ Anodised bronze & Painted
bronze

Aluminium

Living finishes

GU10 LED only, max. 10W each

Ceiling / Wall mounted

350° Rotation, 90° Pivot

New



SP-ANN3-BZ



SP-ANN2-GO



SP-ANN3-GO




SP-ANN2-BZ

anna 2

New


SP-ANN2-GO
SP-ANN2-BZ
2 x GU10 LED



anna 3

New

SP-ANN3-GO
SP-ANN3-BZ
3 x GU10 LED



Key Features

Anodised gold & Sand black
/ Anodised bronze & Painted
bronze

Aluminium

Living finishes

GU10 LED only, max. 10W each

Ceiling / Wall mounted

350° Rotation, 90° Pivot



New

SP-ANN2-GO



SP-ANN4-BZ

anna 4

New

SP-ANN4-GO



SP-ANN4-BZ



4 x GU10 LED



CLASS 1



DIMMABLE

Key Features

Anodised gold & Sand black

/ Anodised bronze & Painted

bronze


Aluminium


Living finishes

GU10 LED only, max. 10W each

Ceiling / Wall mounted

350° Rotation, 90° Pivot

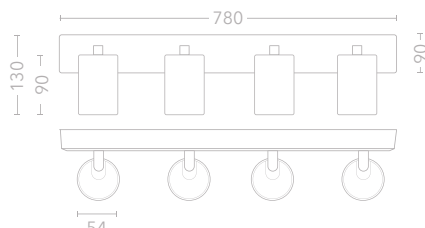

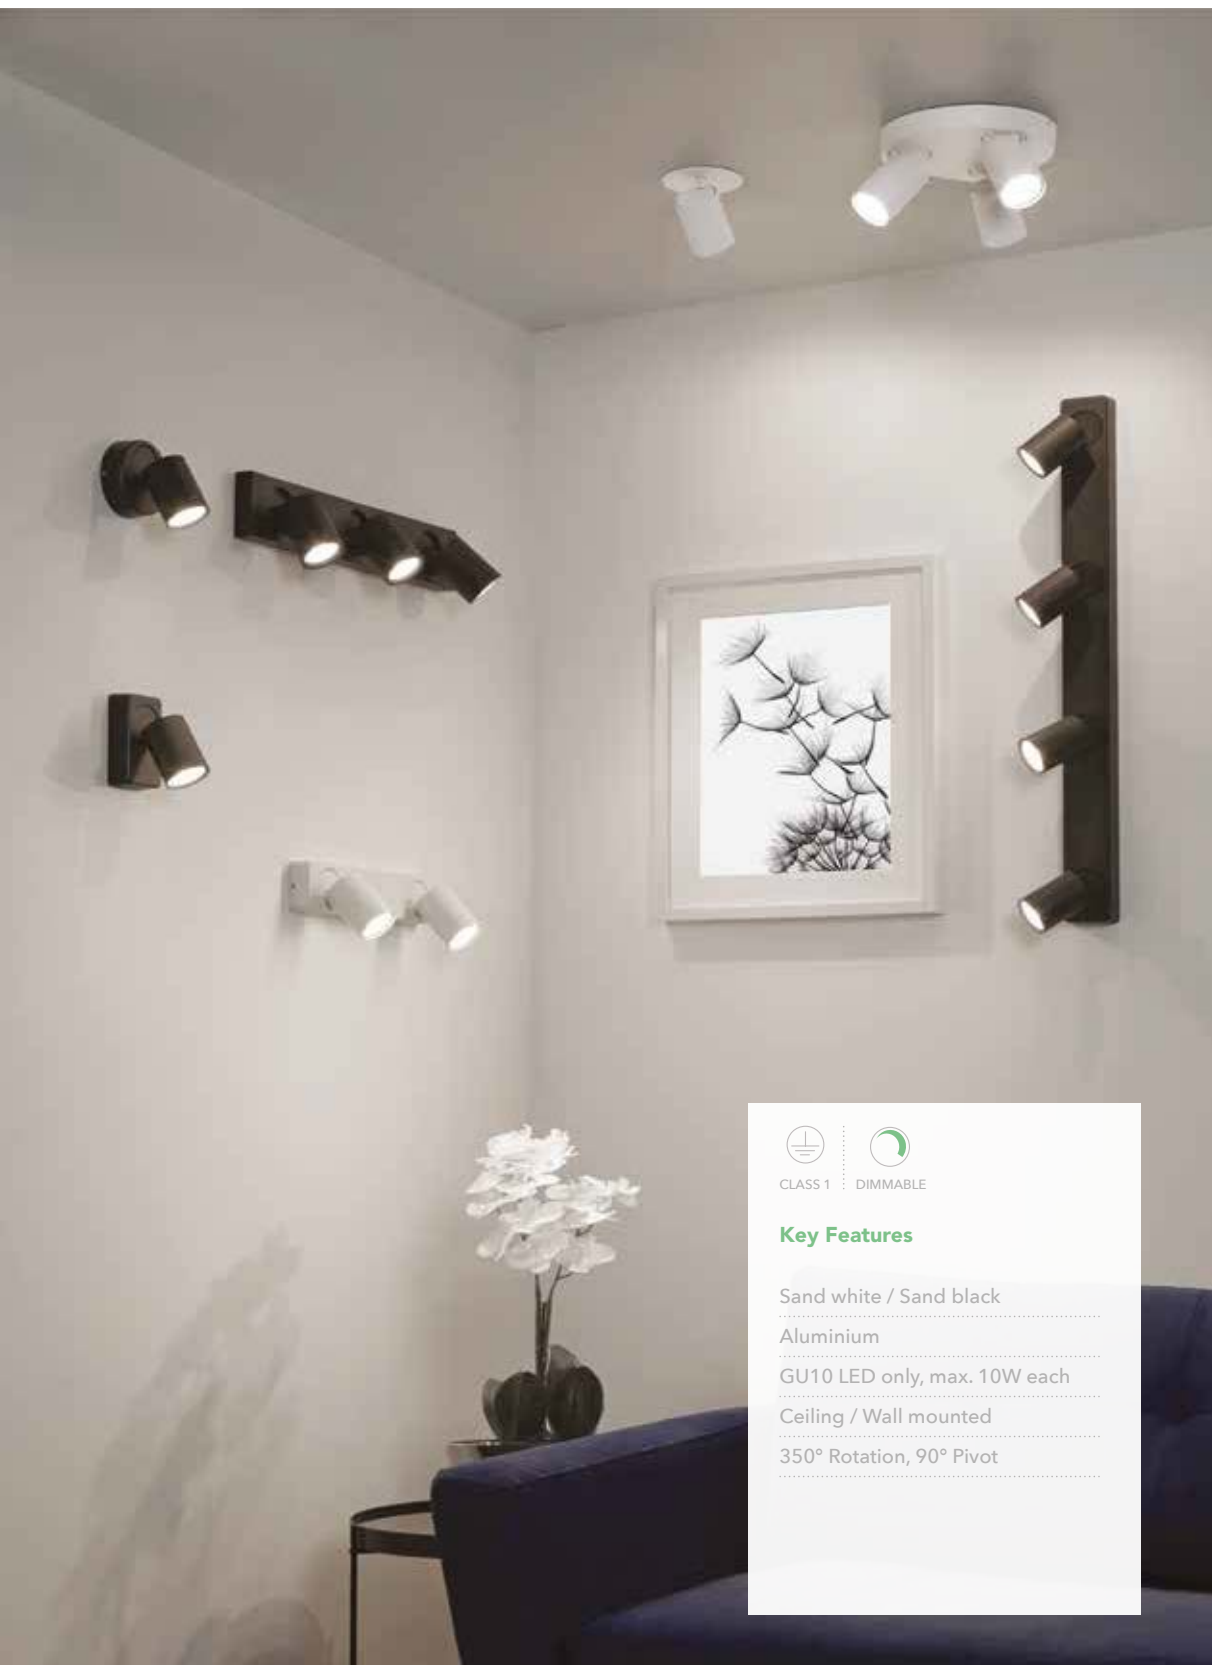

CLASS 1



DIMMABLE

Key Features

Sand white / Sand black

Aluminium

GU10 LED only, max. 10W each

Ceiling / Wall mounted

350° Rotation, 90° Pivot



moon 1




SP-MOO1-B ■
 SP-MOO1-W □
 1 x GU10 LED

moon 1 switched

SP-MOO1S-B ■
 SP-MOO1S-W □
 1 x GU10 LED
 Switched

moon 1 round

SP-MOO1R-B ■
 SP-MOO1R-W □
 1 x GU10 LED





SP-MOO3-W





SP-MOO3L-W

moon 3

SP-MOO3-B 
 SP-MOO3-W 
 3 x GU10 LED

moon 3 bar

SP-MOO3L-B 
 SP-MOO3L-W 
 3 x GU10 LED

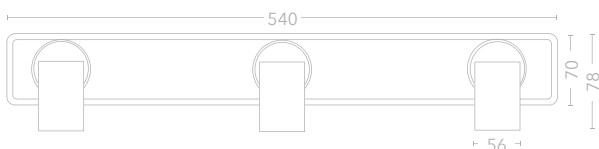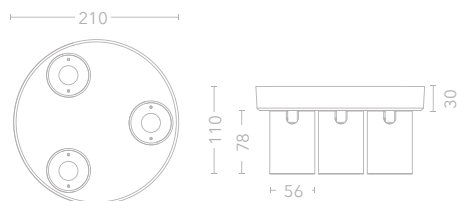



SP-MOO3L-B / SP-MOO4-B



SP-MOO2-W

SP-MOO4-W


moon 4 bar

SP-MOO4-B
SP-MOO4-W
4 x GU10 LED



moon 2 bar

SP-MOO2-B
SP-MOO2-W
2 x GU10 LED

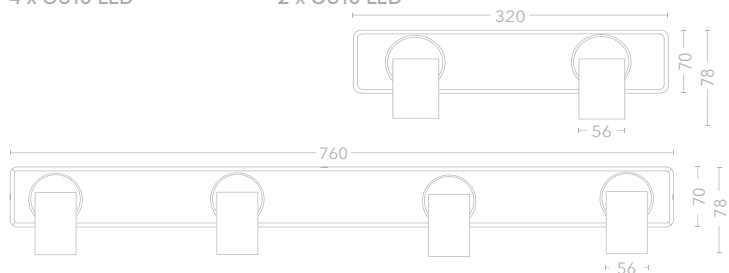

CLASS 1



DIMMABLE

Key Features

Sand white / Sand black

Aluminium

GU10 LED only, max. 10W each

Ceiling / Wall mounted

350° Rotation, 90° Pivot



SP-SEL3R-W



SP-SEL3R-B



SP-SEL3R-W

selene 3 round IP44


SP-SEL3R-B



SP-SEL3R-W



3 x GU10 LED

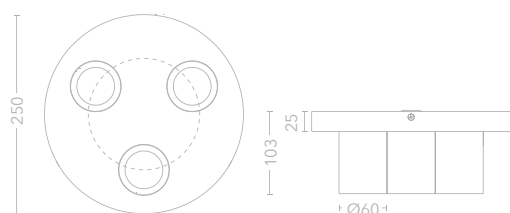

CLASS 2



DIMMABLE



IP44

Key Features

Sand white / Sand black

Aluminium

3 x GU10, max. 10W LED only

Ceiling / Wall mounted


350° Rotation, 90° Pivot



selene 3 bar IP44

SP-SEL3L-B ■
SP-SEL3L-W □

3 x GU10 LED

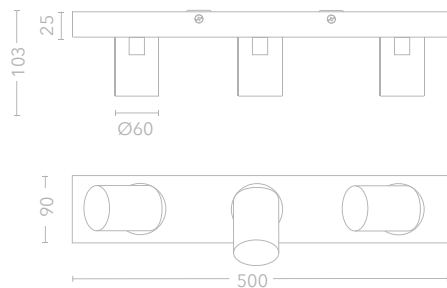

CLASS 2 DIMMABLE IP44

Key Features

Sand white / Sand black

Aluminium

3 x GU10, max. 10W LED only

Ceiling / Wall mounted

350° Rotation, 90° Pivot






SP-JUP1-W



SP-JUP2-B

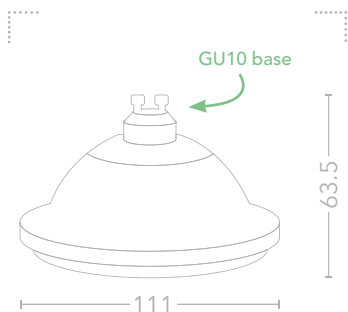

ES111 lamp (not included.)




SP-JUP1-B



SP-JUP2-W


jupiter 1

SP-JUP1-B  
 SP-JUP1-W  
 1 x ES111



jupiter 2

SP-JUP2-B  
 SP-JUP2-W  
 2 x ES111



CLASS 1



DIMMABLE

Key Features

Sand black / Sand white

Steel / Aluminium

Ceiling / Wall mounted

350° Rotation, 120° Pivot



For detailed drawings and specifications along
with help & advice, visit www.projectcollection.co.uk

Wall



New





sunrise

New

WL-SUN-B



360 lumens

WL-SUN-W



650 lumens

WL-SUN-GO



460 lumens

WL-SUN-BZ



450 lumens



CLASS 1



3000K

Key Features

Sand black / Sand white /


Painted gold/ Painted bronze

Aluminium

6W SMD LED

3000K

Can be fitted upside down



New



Anodised Gold



Anodised Bronze



Sand White



Sand Black





WL-ANN1-GO



WL-ANN1-BZ



WL-ANN1-W



WL-ANN1-B



WL-ANN2-BZ



WL-ANN2-W



WL-ANN2-GO




WL-ANN2-B

anna single

New


WL-ANN1-B 
 WL-ANN1-W 
 WL-ANN1-GO 
 WL-ANN1-BZ 
 1 x GU10 LED



anna double

New

WL-ANN2-B 
 WL-ANN2-W 
 WL-ANN2-GO 
 WL-ANN2-BZ 
 2 x GU10 LED



CLASS 1



DIMMABLE

Key Features

Sand black / Sand white /
 Anodised gold* / Anodised
 bronze*

Aluminium

*Living finishes

GU10 LED only, max. 10W each

New





WL-ANNR-B



WL-ANNR-GO



WL-ANNR-BZ



WL-ANNR-GO

anna reader

New

- WL-ANNR-B ■
 WL-ANNR-GO ■
 WL-ANNR-BZ ■



CLASS 1



DIMMABLE



SWITCH

Key Features

Sand black / Anodised gold* /


Anodised bronze*

Aluminium

*Living finishes

GU10 LED only, max. 10W each

350° Rotation, 90° Pivot

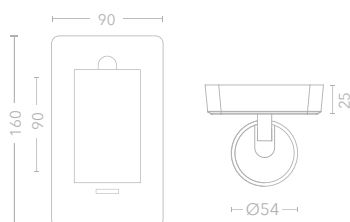



SH-WBPIM2-SN & SH-RL-C



SH-WBPIM2-CP



SH-WBPIM2-AB




SH-WBPIM2-MB

pimlico 2

- SH-WBPIM2-AB
- SH-WBPIM2-CP
- SH-WBPIM2-SN
- SH-WBPIM2-MB

Shades supplied separately,
see pg.176-178

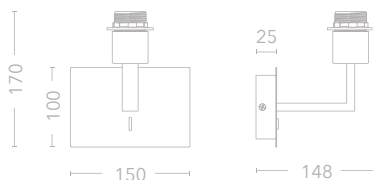

Key Features

Antique brass / Polished chrome /
Satin nickel / Matt black
E27 LED Max. 20W



SH-WBPIM2R-CP



SH-WBPIM2R-SN



SH-WBPIM2R-MB

FINGERPRINT
RESISTANT

SH-WBPIM2R-AB & SH-CO-M

pimlico 2 reader

SH-WBPIM2R-AB



SH-WBPIM2R-CP




SH-WBPIM2R-SN



SH-WBPIM2R-MB



Shades supplied separately,
see pg.176-178

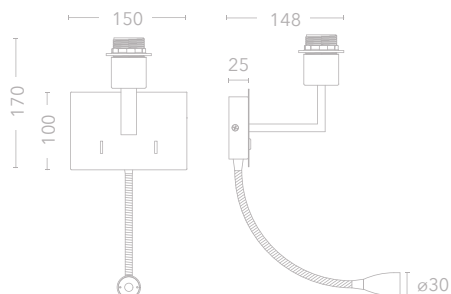

CLASS 1



SWITCH

Key Features

Antique brass / Polished chrome /

Satin nickel / Matt black

E27 LED Max. 20W

Reading Arm

3000K

1W CREE XPE Power LED

90 lumens

Replaceable LED 'MOD1W'



SH-WBVIC-AB



SH-WBVIC-MB



SH-WBVIC-SN



SH-WBVIC-AB & SH-RL-C

Shades supplied
separately,
see pg.176-178



victoria


SH-WBVIC-AB



SH-WBVIC-SN



SH-WBVIC-MB



CLASS 1



DIMMABLE



SWITCH

Key Features

Antique brass / Satin nickel /

Matt black


Steel

E27 LED Max. 20W



victoria reader

SH-WBVICR-AB
SH-WBVICR-SN
SH-WBVICR-MB



Shades supplied separately, see pg.176-178



Key Features

Antique brass / Satin nickel /

Matt black

E27 LED Max. 20W

Reading Arm

3000K

1W CREE Power LED / 90 lumens

E27 LED Max. 20W

90° pivot, 350° rotation

Replaceable LED 'MOD1W'



SP-LAS1S-W



SP-LAS1S-W



SP-LAS1S-B




SP-LAS1S-B

laser spot

SP-LAS1S-B ■▲

SP-LAS1S-W □▲

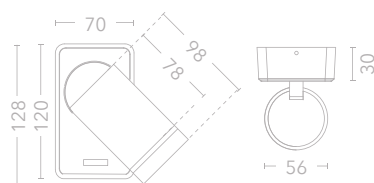

See pages below for the rest of the laser family:

laser pendant	53
laser GU10 track	109
laser reader	143



Key Features

Sand black / Sand white

Aluminium

GU10 Max. 10W LED only

Switch on front face


350° rotation, 90° pivot



WL-LASR-W



WL-LASR-B



WL-LASR-B



WL-LASR-W

laser reader

WL-LASR-B




Backlight: 390 lumens

WL-LASR-W



Backlight: 660 lumens



See pages below for the
laser range:

laser pendant	53
laser GU10 track	109
laser spot	144



CLASS 2



SWITCH

Key Features

Sand black / Sand white

Aluminium / Steel

3000K

Backlight: 7W SMD LED

GU10 Max. 10W LED only

90° pivot, 350° rotation




perla

WL-PRL-B



WL-PRL-W



WL-PRL-B



CLASS 2



DIMMABLE



SWITCH

Key Features

Sand black / Sand white

Aluminium

GU10 Max. 10W LED only

350° backplate rotation

180° head pivot



WL-HALK



WL-HALKB



WL-HALK

halkin


WL-HALKB

230 lumens



WL-HALK

450 lumens

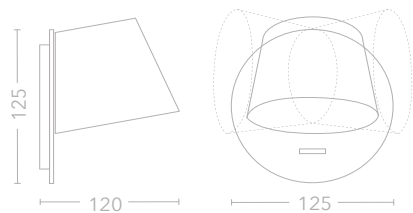

CLASS 1



SWITCH



3000K

Key Features

Sand black / Sand white

Aluminium

3000K

7W SMD LED

350° Rotation



WL-BLF-W



WL-BLF-B

blackfriars


WL-BLF-B



WL-BLF-W



350 lumens



CLASS 2



SWITCH



3000K



FINGERPRINT
RESISTANT

Key Features

Matt black / Sand white

Aluminium / Steel

3000K

3W Bridgelux COB LED

Arm pivots 180°

Head rotates 350° and pivots 90°



WL-CIAR-GO



WL-CIAR-GO



WL-CIAR-BZ




ciara wall

New

WL-CIAR-GO



WL-CIAR-BZ



See pg. 219 for Mini GU10 lamp,
available in 2700K, 3000K and
4000K



CLASS 1




DIMMABLE



SWITCH

Key Features

Anodised gold & Sand black /
Anodised gold & Painted bronze
Aluminium
Living finishes
Mini GU10 lamp (MR11)
max. 5W, LED only
Soft touch flexi-arm

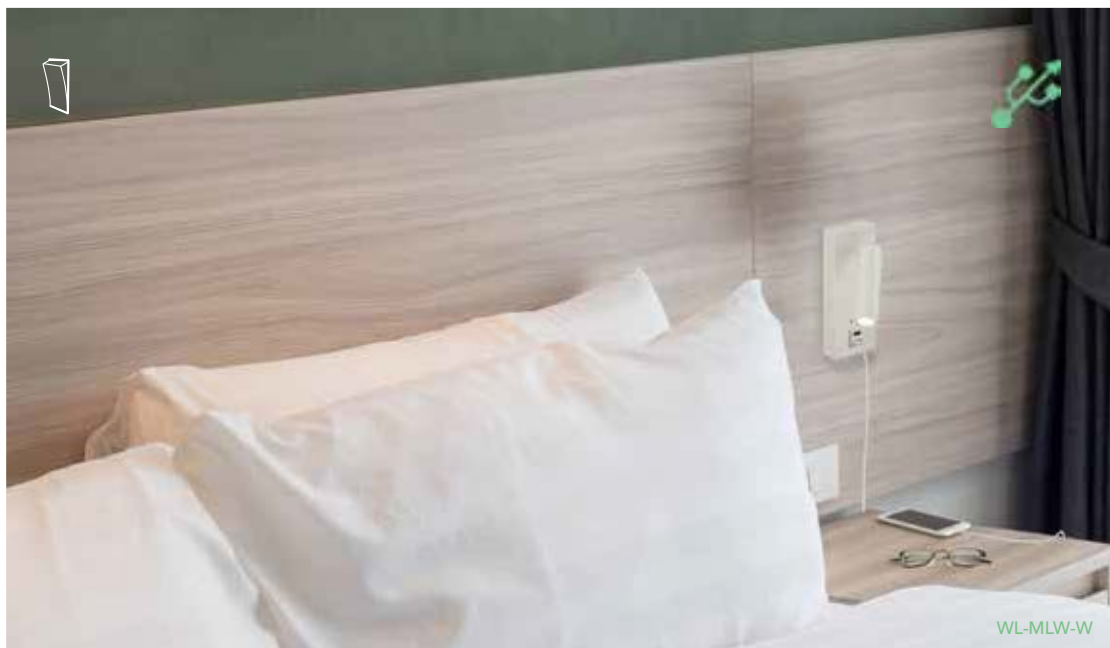

marlow usb



WL-MLW-B




300 lumens

WL-MLW-W



330 lumens

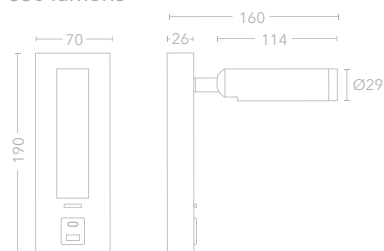

			
CLASS 2	SWITCH	FINGERPRINT RESISTANT	3000K

Key Features

Matt black / Sand white

Aluminium / Steel

3000K

4W Bridgelux COB LED

90° pivot, 350° rotation

2.1 amp USB A and USB C



SH-VICLED-MB



SH-VICLED-SN




FINGERPRINT
RESISTANT
MATT BLACK

victoria LED

SH-VICLED-SN ■

SH-VICLED-MB ■



CLASS 1



SWITCH



3000K

Key Features

Matt black / Satin nickel

Steel / Aluminium

3000K

1W CREE XPE Power LED

90 lumens

90° pivot, 350° rotation



FINGERPRINT
RESISTANT
MATT BLACK



SH-VICLEDR-MB



SH-VICLEDR-MB

victoria LED USB recessed




SH-VICLEDR-MB ■▲



CUT OUT
67mm x 132mm



MIN DEPTH
66mm

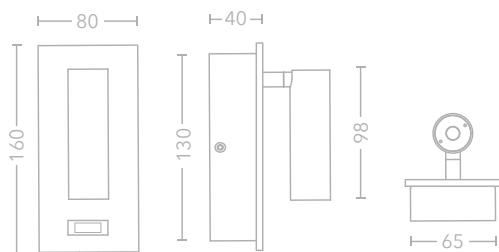

CLASS 1



SWITCH



FINGERPRINT
RESISTANT



3000K

Key Features

Matt black

Steel / Aluminium

3000K

1W CREE Power LED

90 lumens

90° pivot, 350° rotation



Light off in closed position



WL-MAR-B




WL-MAR-SN

marylebone recessed

WL-MAR-B 

WL-MAR-SN 

320 lumens

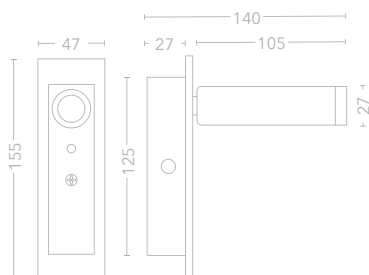CUT OUT
127mm x 40mmMIN DEPTH
28mm

CLASS 1



SWITCH



3200K

FINGERPRINT
RESISTANT

Key Features

Matt black / Satin nickel

Steel / Aluminium

3200K

5W Bridgelux COB LED

90° pivot, 350° rotation

Contact switch - off in the closed
position





LED-PROJ1W-W



LED-PROJ1W-B



LED-PROJ1W-B




Driver supplied
separately, see
pg. 219

mini projector

LED-PROJ1W-B ■▲

LED-PROJ1W-W □▲

90 lumens



CLASS 3



DIMMABLE



3000K



350mA

Key Features

Matt black / Matt white


Aluminium

3000K

1W CREE XPE Power LED

360° rotation, 270° pivot

Dimmable when used with a
dimmable driver

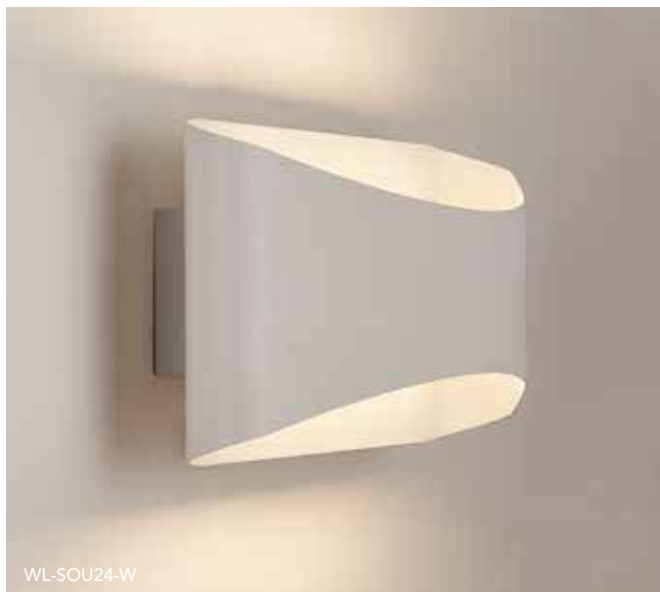

WL-SOU24-W



WL-SOU24-B

WL-SOU24-W



Interior view



WL-SOU24-B


southwark

WL-SOU24-B ■

350 lumens

WL-SOU24-W □

720 lumens

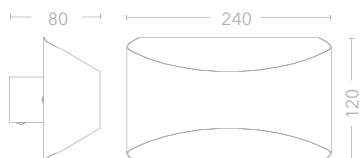

CLASS 1



DIMMABLE



3000K

Key Features

Sand black / Sand white

Aluminium

3000K

12W SMD LED



WL-SLO1-B



WL-SLO1-W




WL-SLO2-B



Interior view


sloane 1

- WL-SLO1N-B ■
260 lumens
- WL-SLO1N-W □
270 lumens



sloane 2

- WL-SLO2-B ■
500 lumens
- WL-SLO2-W □
525 lumens



CLASS 1



3000K

Key Features

Sand black / Sand white

Aluminium

3000K

Dimmable (Sloane 2 only)

4W / 6W Power LED






WL-LB10



WL-LB20

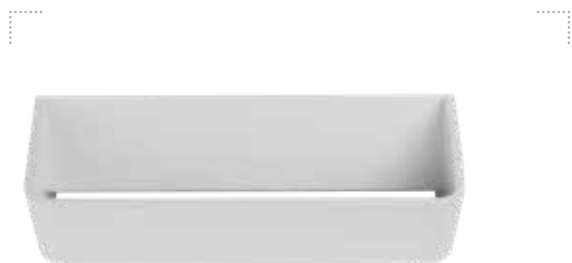

WL-LB38



WL-LB38



WL-LB20

london bridge

WL-LB10

7W POWER LED
450 lumens



WL-LB20

7W SMD LED
600 lumens



WL-LB38

13W SMD LED
1050 lumens



CLASS 1




3000K

Key Features

Sand white

3000K

Can be fitted vertically or
horizontally

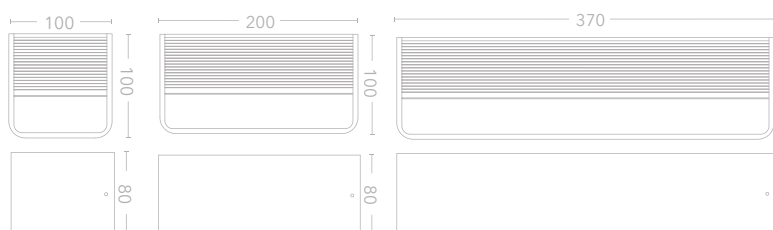

New



2 CCT

vavin 60

WL-VAV60*



WL-VAVS60



16W LED

620 lumens at 3000K

650 lumens at 4000K

vavin 90

WL-VAV90*



WL-VAVS90



25W LED

870 lumens at 3000K

940 lumens at 4000K

vavin 120

WL-VAV120*



WL-VAVS120



36W LED

1250 lumens at 3000K

1390 lumens at 4000K



CLASS 2



DIMMABLE



2CCT

Key Features

Sand white

Metal/Acrylic

3000K/ 4000K selectable

switch on back of fitting

* 3000K only





BA-VER90



BA-VER90



BA-VEN90

veritas 90cm

BA-VER90



18W SMD LED
1570 lumens

venti 90cm

BA-VEN90



24W SMD LED
1080 lumens

Removable pull cord



CLASS 1




3000K



IP44

Key Features



Polished chrome /
Opal Polycarbonate / Frosted
3000K
Can be fitted vertically
or horizontally
Bathroom zone 2



New




Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
WL-ODO20-W	7	585	620
WL-ODO30-W	12	870	940

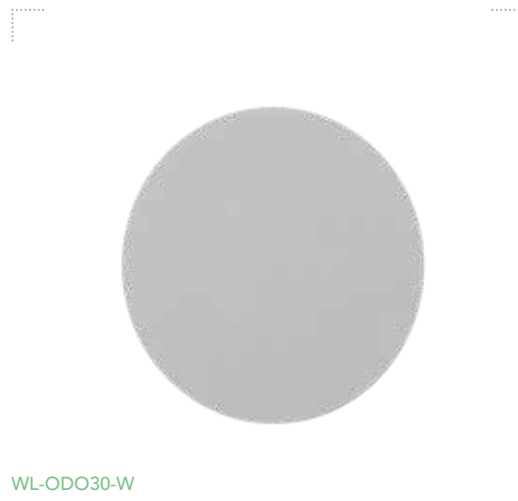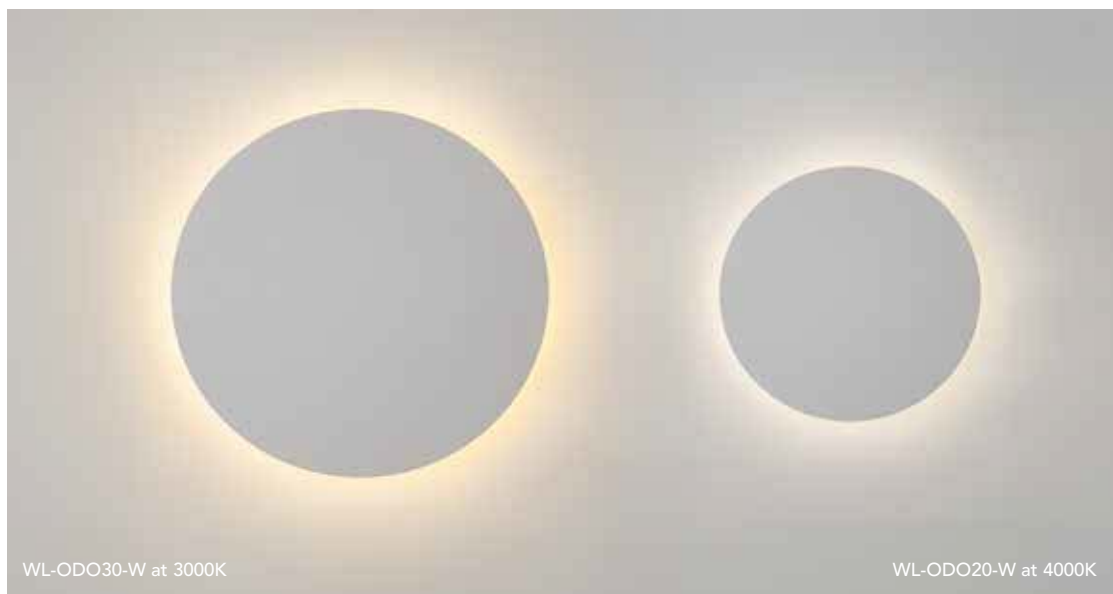

odeon 20cm

New


WL-ODO20-W ☐



odeon 30cm

New

WL-ODO30-W ☐



CLASS 1



DIMMABLE



2 CCT

Key Features

Sand white

Steel

CCT Selectable 3000K / 4000K

CCT Switch in backplate



PL-AVRON



PL-AVRON



PL-AVRON

avron

PL-AVRON



600 lumens



CLASS 2



3000K



PAINTABLE

Key Features

White plaster

3000K

10W SMD LED

Paintable with a good quality
emulsion paint



PL-CADET




PL-CADET



PL-CADET

cadet

PL-CADET
700 lumens



CLASS 2



3000K



PAINTABLE

Key Features

White plaster

3000K

9W SMD LED

Paintable with a good quality
emulsion paint



PL-CONCO



PL-CONCO



PL-CONCO



PL-CONCS

concorde round

PL-CONCO



concorde square

PL-CONCS



CLASS 2



DIMMABLE



PAINTABLE



Key Features

White plaster

2 x Max. 10W GU10 LED

Paintable with a good quality

emulsion paint






PL-EUROR



PL-EUROR

europa round

PL-EUROR
170 lumens



CLASS 2



3000K



PAINTABLE

Key Features

White plaster

3000K

6W CREE COB LED

Paintable with a good quality
emulsion paint



For detailed drawings and specifications along
with help & advice, visit www.projectcollection.co.uk

table & floor



New

ciara flexi table

TA-CIA-GO




EUTA-CIA-GO



TA-CIA-BZ



EUTA-CIA-BZ

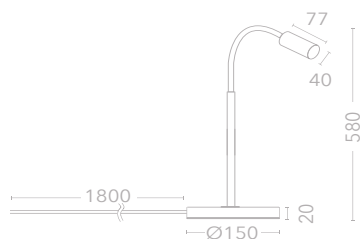

CLASS 1



SWITCH

Key Features

Anodised bronze/ Anodised gold

Aluminium

Living finishes

Mini GU10 (MR11) LED only,

Max. 5 W

Soft touch flexi-arm

Switch on base



FS-CIA-BZ



TA-CIA-GO



Anodised gold



Anodised bronze

ciara flexi floor

FS-CIA-GO



FS-CIA-BZ




EUFS-CIA-GO



EUFS-CIA-BZ



See pg. 219 for Mini GU10 lamp, available in 2700K, 3000K and 4000K

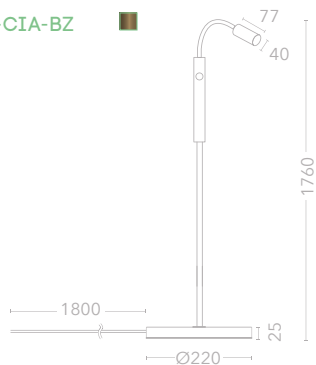

CLASS 1



DIMMABLE



SWITCH

Key Features

Anodised bronze/ Anodised gold

Aluminium

Living finishes

Mini GU10 (MR11) LED only,

Max. 5 W

Dimmable by rotary switch

Soft touch flexi-arm



See pg. 108 for libra track



TA-LIB2-W



Sand Black




Sand White

libra 2 table

TA-LIB2-B
TA-LIB2-W



EUTA-LIB2-B
EUTA-LIB2-W



CLASS 2



SWITCH

Key Features

Sand black / Sand white

Die cast construction

GU10 max. 10W LED only



TA-OLY-AB-USB & SH-DR30-C



TA-OLY-AB




TA-OLY-SN-USB

olympia table USB base

TA-OLY-AB-USB	■
TA-OLY-SN-USB	■
EUTA-OLY-AB-USB	■
EUTA-OLY-SN-USB	■

olympia table base

TA-OLY-AB	■
TA-OLY-SN	■
EUTA-OLY-AB	■
EUTA-OLY-SN	■

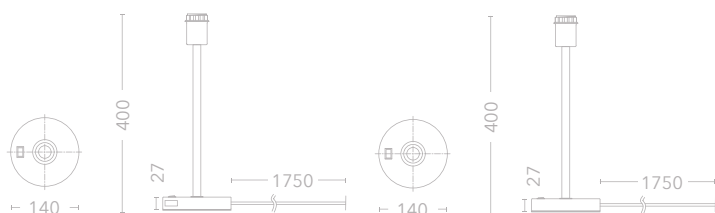

Key Features

Antique brass / Satin nickel

E27 max. 20W / LED only

Switch on base



FS-OLY-SN & SH-DR40-M



Shades supplied separately, see pg.176-179



FS-OLY-AB

FS-OLY-SN

olympia floor base

FS-OLY-AB




FS-OLY-SN



EUFS-OLY-AB



EUFS-OLY-SN



CLASS 2



SWITCH

Key Features

Antique brass / Satin nickel

E27 max. 20W / LED only


Inline switch on cable



shades



shades



Colour		Cone	Small Rectangle	Large Rectangle	Drum 15	Drum 30	Drum 40
	Coconut	SH-CO-C	SH-RS-C	SH-RL-C	SH-DR15-C ▲	SH-DR30-C	SH-DR40-C
	Mushroom	SH-CO-M	SH-RS-M	SH-RL-M	SH-DR15-M ▲	SH-DR30-M	SH-DR40-M
	Grey Seal					SH-DR30-G ▲	SH-DR40-G ▲

Range	Page no.						
3lt Suspension	179						●
3lt Semi-flush	179						●
Pimlico 2	136-137	●	●	●	●		
Victoria	138	●	●	●	●		
Fenchurch	140	●			●		
Olympia Table	172	●		●		●	
Olympia Floor	173						●

Key


- C - Coconut
- M - Mushroom
- G - Grey seal

All the shades in this collection are:
White PVC lining
To suit E27/E14/B22 shade ring
For use with LED lamps only
Available from stock in the UK
Flame retardant

Shade material without light source



Shade material with 3000K light source

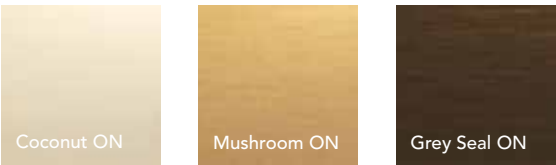


drum 15cm



SH-DR15-M

- ☐ SH-DR15-C ▲
☒ SH-DR15-M ▲




drum 30cm



SH-DR30-G

- ☐ SH-DR30-C ☒ SH-DR30-M
☒ SH-DR30-G ▲

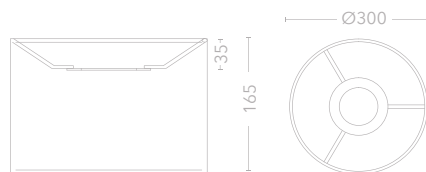


drum 40cm



SH-DR40-G

- ☐ SH-DR40-C ☒ SH-DR40-M
☒ SH-DR40-G ▲

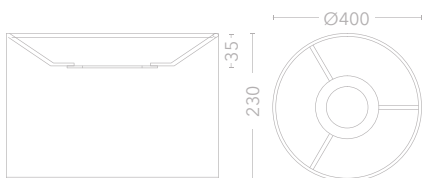


40cm drum diffuser



SH-DIF40

- ☐ SH-DIF40 ▲




small rectangle



SH-RS-M

- ☐ SH-RS-C ☒ SH-RS-M




large rectangle



SH-RL-G

- ☐ SH-RL-C ☒ SH-RL-M




cone



SH-CO-M

- ☐ SH-CO-C ☒ SH-CO-M

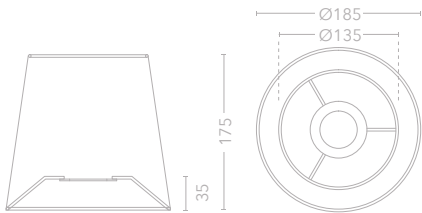



SH-SF3-SN



SH-P3-SN




E27 3 light semi flush

SH-SF3-SN



E27 3 light suspension

SH-P3-SN

1.8m adjustable clear
cable

CLASS 1



DIMMABLE

Key Features

E27 20W Max

LED only / 220-240V

IP20

Height adjustable

Suitable for:
Drum 30 & Drum 40 shades. Shades
available in colours:
Grey seal / Coconut / Mushroom



Products with this symbol can be used in coastal locations*

* see pg. 3 for details



outdoor





COASTAL
>1KM



IPR-EUSSS



IPR-EUSSS



IPR-EUSSS



IPR-EUSSS



euston 230V

IPR-EUSSS




420 lumens



CUT OUT
55mm



DRIVE OVER
2000kg



Installation tube



CLASS 1



IP67



3000K



230 VOLTS

Key Features

Satin stainless steel Grade 316 /

Passivated aluminium body

3000K

6W CREE COB LED

Integral driver

Includes installation tube

Installation tube must be used for
drive over applications



COASTAL
>1KM



IP67



3000K



700mA



DRIVE OVER
2000kg

Key Features

Satin stainless steel Grade 316 cover /

Passivated aluminium body

3000K

3W CREE XPE Power LED

Driver supplied separately

Fittings must be wired in series

Dimmable when used with a dimmable
driver

Installation tube must be used for drive
over applications



Driver supplied separately, see pg. 219



4 way plot light

IPR-PLOT4SS
4 x 70° Beam

3 way plot light

IPR-PLOT3SS
3 x 70° Beam




2 way plot light

IPR-PLOT2SS
2 x 110° Beam

1 way plot light

IPR-PLOT1SS
1 x 110° Beam

Average 90 lumens





COASTAL
>1KM



IPR-PICRSS



IPR-PICRSS



IPR-PICRSS

Driver supplied
separately, see
pg. 219



piccadilly IP67



IPR-PICRSS




220 lumens

20° beam



CUT OUT
36mm



CUT OUT
with installation tube
39mm



DIMMABLE



IP67



3000K



700mA

Key Features

Satin stainless steel Grade 316 top

/ Passivated aluminium body

3000K

3W CREE XPE Power LED

Driver supplied separately

Fittings must be wired in series

Dimmable when used with a
dimmable driver

Includes installation tube



COASTAL
>1KM



Driver supplied
separately, see
pg. 219



paddington round IP67



IPR-PADRSS30



30° beam

IPR-PADRSS15




15° beam



CUT OUT
21mm



CUT OUT
with installation tube
26mm



paddington square IP67



IPR-PADSSS15




15° beam



CUT OUT
21mm



CUT OUT
with installation tube
26mm



DIMMABLE



IP67



3000K



700mA

Key Features

Satin stainless steel Grade 316

cover / Passivated aluminium body

3000K / 90 lumens

1W CREE XPE Power LED

Driver supplied separately

Fittings must be wired in series

Dimmable when used with a

dimable driver

Includes installation tube



COASTAL
>1KM



OD-BEA-G




OD-BEA-G

beaumont

OD-BEA-G



520 lumens



CLASS 1



IP65



3000K



230 VOLTS

Key Features

Graphite

Aluminium


3000K

5W Osram Power LED

Warrantied for installations more
than 1000m from the coastline



COASTAL
>1KM

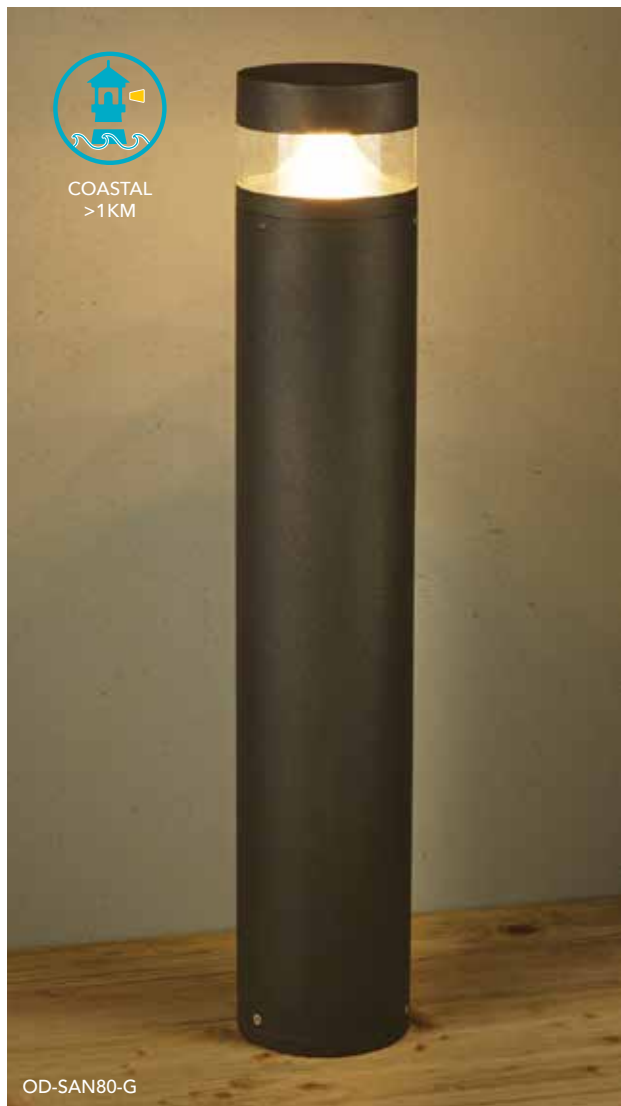

OD-SAN80-G

OD-SAN80-G

outdoor

sanderson bollard

OD-SAN80-G



700 lumens



CLASS 1



IP54



3000K



230 VOLTS

Key Features

Graphite

Aluminium

3000K

9W Osram SMD LED

Warrantied for installations more
than 1000m from the coastline



COASTAL
>1KM



OD-FARR & OD-FPOLE



OD-FARR

farrington 8W 230V

OD-FARR




8w CREE COB LED

550 Lumens

Pre fitted with 24° reflector,

10° reflector supplied



farrington extension pole

OD-FPOLE



300mm extension pole,

use 2 for a 600mm extension



OD-FARR



OD-FARP & 2 x OD-FPOLE



OD-FARP


farrington plus 14W 230V

OD-FARP

14W CREE COB LED

1400 lumens

25° beam angle



OD-FARP



CLASS 1



IP67



3000K



230 VOLTS

Key Features

Passivated black

Aluminium

3000K

Compatible with OD-FPOLE

Warrantied for installations

more than 1000m from the
coastline




COASTAL
>1KM



grosvenor bollard 80cm

OD-GRO80-G ■
600 lumens



grosvenor bollard 30cm

OD-GRO30-G ■
600 lumens



CLASS 1



IP54



3000K



230 VOLTS

Key Features

Graphite

Aluminium

3000K

8W CREE COB LED

Warrantied for installation up to
1 km from the coast



COASTAL
>1KM



OD-GRO80-G



OD-GRO30-G



OD-GRO230-G



OD-GRO280-G




OD-GRO230-G

outdoor


grosvenor II bollard 80cm

OD-GRO280-G ■
660 lumens



grosvenor II bollard 30cm

OD-GRO230-G ■
660 lumens



CLASS 1



IP65



3000K



230 VOLTS

Key Features

Graphite

Aluminium

3000K

13W CREE COB LED

Warrantied for installation up to
1km from the coast



OD-CON-G



OD-CONP-G



OD-CON-G




OD-CONP-G

connaught

OD-CON-G


13W CREE COB LED
1000 Lumens



connaught plus

OD-CONP-G

28W CREE COB LED
2150 Lumens



Key Features

Graphite

Aluminium

3000K

Warrantied for installations more
than 1000m from the coastline



COASTAL
>1KM



OD-CONP-G



OD-CON-G

outdoor



OD-SAV-G



OD-LAN-G



OD-SAV-G

savoy

OD-SAV-G

700 lumens



CLASS 1



IP65



3000K



230 VOLTS

Key Features

Graphite

Aluminium

3000K

13W CREE Power LED

Warrantied for installations more than 1000m from the coastline



COASTAL
>1KM



OD-LAN-G




OD-SAV-G

lanesborough

OD-LAN-G

1150 lumens



OD-LAN-G



CLASS 1



IP65



3000K



230 VOLTS

Key Features

Graphite

Aluminium

3000K

13W CREE COB LED



Warrantied for installations more
than 1000m from the coastline



savoy plus

OD-SAVP-G ■
1850 lumens

Narrow beam reaches up
to 6m in each direction



CLASS 1 IP65 3000K 230 VOLTS

Key Features


Graphite
Aluminium
3000K
18W Osram Power LED
Warrantied for installations more
than 1000m from the coastline



OD-BER2-G



OD-BER2-G

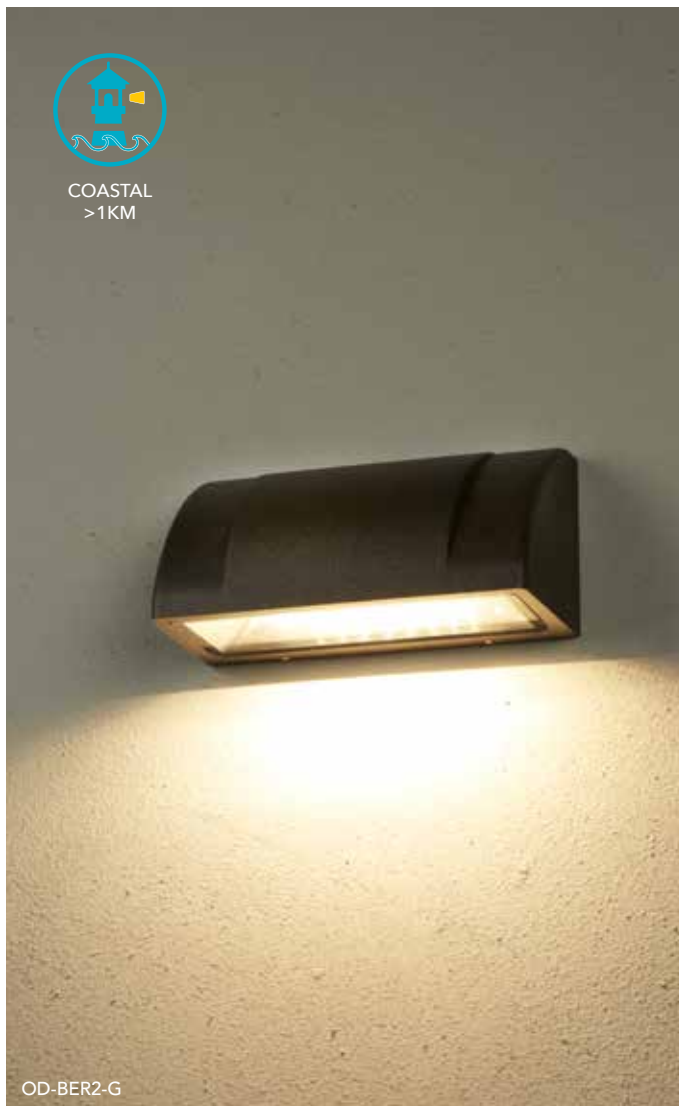


OD-BER2-G

berkeley II

OD-BER2-G ■ ▲

8W Osram LED

825 lumens



CLASS 1



IP54



3000K



230 VOLTS

Key Features

Graphite

Aluminium

3000K

8W Osram LED

Warrantied for installations more than 1000m from the coastline

Only to be fitted in the downward position, as shown



COASTAL
>1KM



OD-STR-G



OD-MAY-G



Adjustable beam angles



OD-STR-G



OD-MAY-G



OD-STR-G




OD-MAY-G

strand adjustable

OD-STR-G



13W CREE LED
500 lumens



mayfair adjustable

OD-MAY-G

6W CREE LED
270 lumens



Key Features


Graphite

Aluminium

3000K

Warrantied for installations more
than 1000m from the coastline

Adjustable shutters top and
bottom to change the beam
angles independently

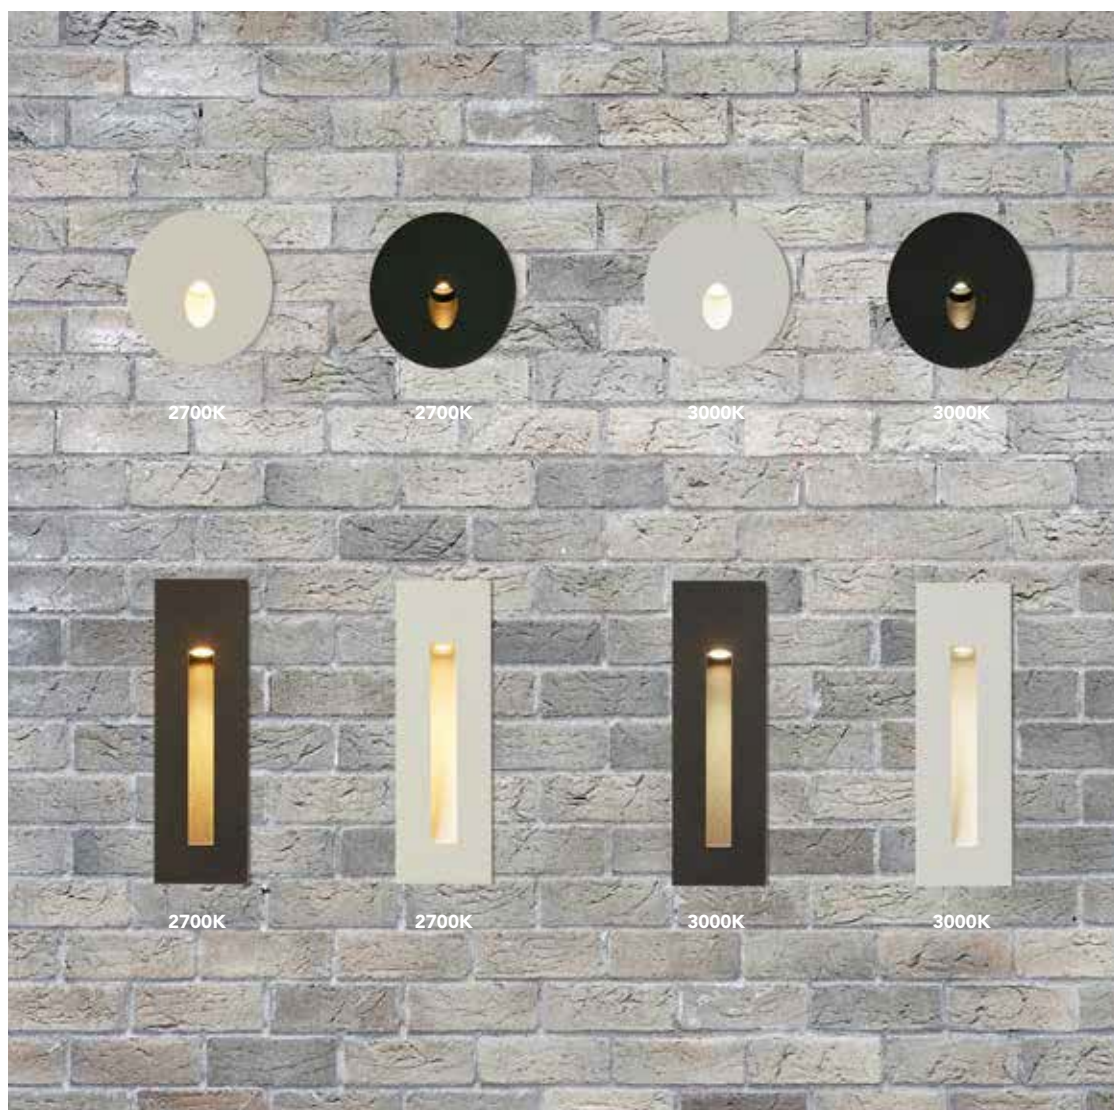

simplon IP65



IPR-WSLW

pyrenees IP65



IPR-WRB



IP65



COASTAL
>1KM

Key Features

Aluminium body

1W CREE XPE LED

Wall mounted

350mA items require a separate

driver

See Pg. 206-207 for all information including product codes and technical drawings



OD-TRA-B



OD-TRA-W




trafalgar GU10 IP65

OD-TRA-B



OD-TRA-W



CLASS 1



IP65



230 VOLTS

Key Features

Sand black / Sand white

Aluminium / Glass

GU10 max. 10W LED only



COASTAL



OD-KYOS




OD-KYOS

kyoto small

OD-KYOS



1000 lumens



CLASS 2



IP54



3000K



230 VOLTS

Key Features

Dark grey

PC / ABS Material

3000K

17W SMD LED

Corrosion resistant


Suitable for use in coastal areas

Wall or ceiling mounted




tokyo

OD-TOKYO
800 lumens



chiba duo

OD-CHIBA
1050 lumens



CLASS 2



IP54



3000K



230 VOLTS

Key Features

Dark grey

PC / ABS Material

3000K

13W SMD LED


Corrosion resistant

Suitable for use in coastal areas

Wall or ceiling mounted





Item Code	CE-PERI30
Lightsource lumens at 3000K	2550
Lightsource lumens at 4000K	2750
Lightsource lumens at 5000K	2700

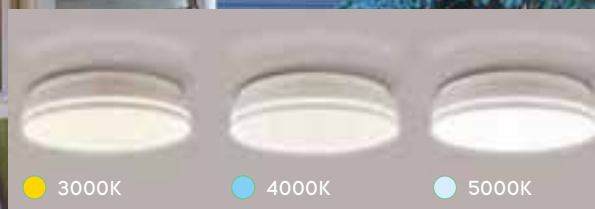

peri 30cm

CE-PERI30



Key Features

- White
- Polycarbonate
- 3000K / 4000K / 5000K selectable
- CCT switch in body
- 17W SMD LED
- Rear and side cable entries
- Ceiling or wall mounted



COASTAL



OD-YOK




OD-YOK

yokohama

OD-YOK



320 lumens

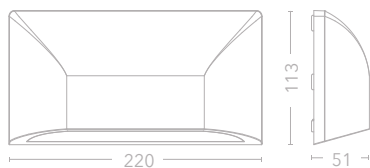

CLASS 2



IP54



3000K



230 VOLTS

Key Features

Dark grey

PC / ABS Material

3000K

6W SMD LED

Corrosion resistant

Suitable for use in coastal areas

Surface mounted



COASTAL



OD-SAPS-GW



OD-SAPS-GW




OD-SAPS-GW

sapporo square

OD-SAPS-GW

45 lumens



CLASS 2



IP65



3000K



230 VOLTS

Key Features

Dark grey and white covers

supplied in the box

PC / ABS Material

3000K

1.1W SMD LED

Corrosion resistant

Suitable for use in coastal areas

Surface mounted




OD-SAPL-GW

OD-SUZ-GW

sapporo long

OD-SAPL-GW ■/□
3.5W SMD LED
265 lumens



suzuka slot

OD-SUZ-GW ■/□
3W SMD LED
310 lumens



CLASS 2 IP65 3000K 230 VOLTS

Key Features

Dark grey and white covers
supplied in the box

PC / ABS Material

3000K

Corrosion resistant

Suitable for use in coastal areas

Surface mounted

bathroom overview

recessed



Zelda Round IP65 FR

New

pg: 76

DL-ZELRB




DL-ZELRW



CUT OUT
65mm



MIN DEPTH
36mm

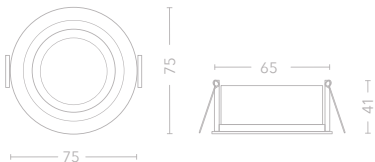

zelda trimless round IP65 FR

New

pg: 80

PL-ZELRB




PL-ZELRW



CUT OUT
78mm



MIN DEPTH
135mm

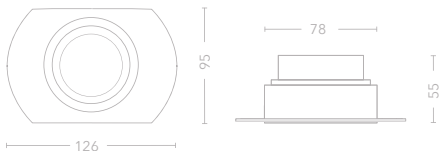

zelda trimless square IP65 FR

New

pg: 81

PL-ZELSQB




PL-ZELSQW



CUT OUT
80x80mm



MIN DEPTH
135mm

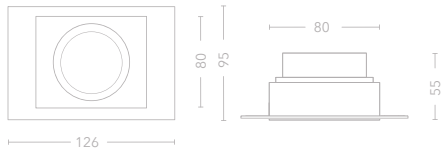

slim trim IP65

pg: 77

DL-SLIMIPB




DL-SLIMIPW



CUT OUT
70mm



MIN DEPTH
135mm





holborn & hoxton

pg: 100

IPR-HOLSS




IPR-HOXSS



IPR-HOXSS



CUT OUT
38mm




diana

pg: 101

DL-DIA-W



CUT OUT
38mm




glacier round IP65

pg: 78

DL-GLAR



CUT OUT
70mm

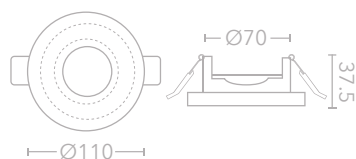

sophie IP65

pg: 79


DL-SOPWB



CUT OUT
65mm



MIN DEPTH
120mm

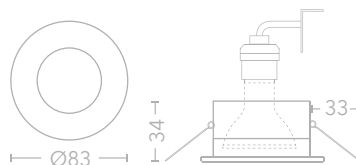


recessed wall



pyrenees IP65

For all product codes, see
page 93

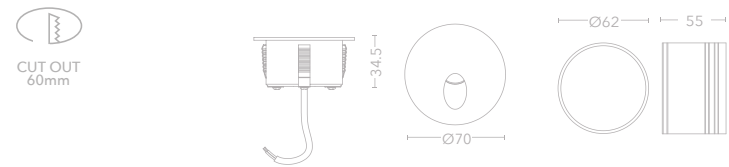


pg: 95



simplon IP65

For all product codes, see
page 94

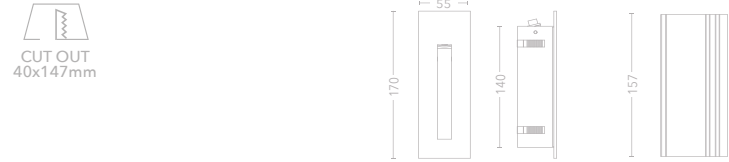

pg: 96


wall



venti 90cm

BA-VEN90

pg: 159



veritas 90cm

BA-VER90

pg: 159



spotlights



selene 3 IP44

pg: 126-127

SP-SEL3R-B	■
SP-SEL3R-W	□
SP-SEL3L-B	■
SP-SEL3L-W	□

See page no. above for
technical drawings

ceiling

andaman / banda
IP44

pg: 50-51

FL-ADM40-W	□
FL-ADM30-W	□
FL-BAN35-B	■
FL-BAN23-B	■


See page no. above for
technical drawings



peri 30cm

pg: 47


CE-PER130	□▲
-----------	----



verve IP44

pg: 48-49

CE-VER30-B	■
CE-VER30-W	□
CE-VER40-B	■
CE-VER40-W	□






acqua

BA-M-ACQUA



19W SMD LED

1330 lumens



CLASS 2



3000K



IP44



DE-MISTER

Key Features

Frosted / Mirrored glass

3000K

Removable pull cord

Demister pad heats the centre of the mirror when the light source is on



All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone.

IP rating = Ingress Protection rating.

zone 0

The area inside the bath or shower tray. Fittings must be rated at IPX7 or higher (protected against immersion in water).

zone 1

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

zone 2

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

outside zone

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

guide to constant current LEDs

Constant current LED items can be identified because the operating power is quoted in milliamps (mA). Project Collection constant current items are either 350mA or 700mA.

Do I need a separate driver?

Yes, choose a 350mA or 700mA driver to suit the number of fittings you want to run, and whether you want to dim the item. Fittings must be wired in series.

Is this dimmable?

Yes, if used with a dimmable 350mA driver and a compatible dimmer.


How do I work out which driver I need?

Identify the current, 350mA or 700mA.
Note the wattage of each item, e.g 1W, 3W

item wattage x no. of items = total wattage
select your driver to suit your requirements

How do I wire this?

In series. See the drivers listed below, the product fitting instructions or the drawing below

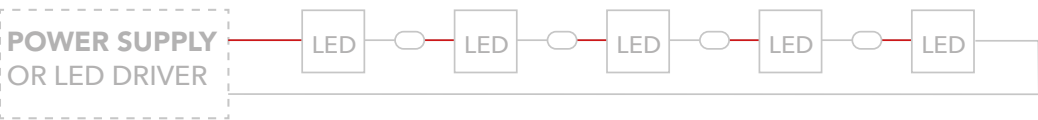

* NOTE: All these drivers must be wired in series

The driver doesn't fit through the hole / where do I put the driver?

Drivers should be sited somewhere you can access them for maintenance. This can be up to 60m away from the furthest fitting.

The driver will often be larger than the hole cut out for the item. Again, locate it in another place, where you can access it in the future if required

troubleshooting

The first fitting lights up, the others don't come on

You have wired this in parallel (not in series). You will need to buy replacements for all but the first one.

These are not repairable.

All the fittings have failed

This is due to driver failure. Check that you have wired the circuit correctly, or the driver may fail again.

My fittings come on for a while, then they go off, and turn back on by themselves later

Your driver is overheating. Improve the air flow around it.

My fittings are all flashing

This is a driver issue. First check your driver is not overrun or under-run (i.e. within the minimum and maximum wattages). Otherwise it is a faulty driver.

The first fitting in the circuit stays on after the circuit is turned off

You have residual current in the circuit, or current leakage. Try changing the switch. If these are on a circuit with an intermediate switch it is almost impossible to prevent a small amount of current leakage.

troubleshooting

accessories

modules



**1w IP65
350mA
LED module**

1W CREE XPE 350mA
Beam angle: 30°
95 lumens

MOD1WIP 3000K 
MOD1WIP-2700 2700K 

**1w IP65 230V
LED module**

1W CREE XPE 350mA
Beam angle: 30°
95 lumens


MOD1WIP230 3000K 
MOD1WIP230V-2700 2700K 

**1w 350mA
LED module**

1W CREE XPE 350mA
Beam angle: 30°
95 lumens

MOD1W 3000K 
MOD1W-2700 2700K 

suspensions

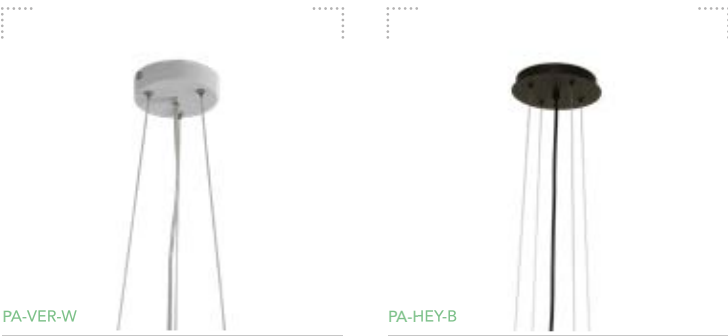

verve suspension

PA-VER-B 
PA-VER-W 
2m drop

hey-lo suspension

PA-HEY-B 
PA-HEY-W 
2m drop

lamps



3w mini GU10 LED lamp

- L10113-27 2700K (270 lumens)
- L10113-3 3000K (285 lumens)
- L10113-4 4000K (310 lumens)

What is a mini GU10?



L10113-27

constant current drivers




MOD1WIP

DR350-18TD

Item no.	Current	Min. load	Max. load	TRIAC dimmable	IP Rating	Power factor	Dimensions L x W x H (mm)	Tails / Screw terminals
DR350-3	350mA	1W	3W	No	IP65	0.9	38 x 27 x 21	Tails
DR350-3TD	350mA	2W	3W	Yes	IP65	0.9	38 x 27 x 21	Tails
DR350-7	350mA	1W	7W	No	IP65	0.4	60 x 35 x 23	Tails
DR350-9TD	350mA	2W	9W	Yes	IP20	0.9	110 x 45 x 28	Screw terminals
DR350-18TD	350mA	10W	18W	Yes	IP20	0.9	165 x 52 x 25	Screw terminals
DR700-9	700mA	3W	9W	No	IP65	0.5	60 x 35 x 23	Tails
DR700-18TD	700mA	6W	18W	Yes	IP20	0.9	110 x 45 x 28	Screw terminals
DR700-36TD	700mA	20W	36W	Yes	IP20	0.9	165 x 52 x 25	Screw terminals

guide to symbols

						
EN	Class 1	Class 2	Class 3	Operating power	Dimmable	Switched
FR	Classe I	Classe II	Classe III	Alimentation	Dimmable	Avec interrupter
NL	Klasse 1	Klasse 2	Klasse 3	Vermogen	Dimbaar	Schakelaar
DE	Klasse 1	Klasse 1	Klasse 3	Betriebsleistung	Dimmbar	Schalterung
ES	Class 1	Class 2	Class 3	Potencia	Regulable	Con interruptor
SW	Klass 1	Klass 2	Klass 3	driftkraft	Dimbar	Strömbrytare
HU	1-es osztály	2-es osztály	3-as osztály	Teljesítmény	Dimmelhető	Kapcsoló

						
EN	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB Charging	Motion sensor	Anti-glare
FR	LED 1 CCT	LED 2 CCT	LED 3 CCT	Prise USB	Capteur de mouvement	Antireflet
NL	LED 1 CCT	LED 2 CCT	LED 3 CCT	"USB Oplader"	Bewegingssensor	Anti Slip
DE	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB-Ladung	Bewegungsmelder	Blendschutz
ES	LED 1 CCT	LED 2 CCT	LED 3 CCT	Cargador USB	Sensor de movimiento	Antideslizante
SW	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB laddning	Rörelsevakt	Anti reflex
HU	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB töltő	Mozgásérzékelő	Vakításgátló

						
EN	IP Rating	Fire rated	Fingerprint resistant	Coastal use	Drive over	Walkover
FR	Classification IP	Resistant au feu	Résistance à l'empreinte digitale	Classification côtière/littoral	Rouler dessus	Marcher dessus
NL	IP Rating	Brandwerend	"Vingerafdruk-bestendig"	Kust bestendig	Overrijdbaar	Loopbaar
DE	IP-Bewertung	Brandschutzklasse	Fingerabdruck-resistent	Verwendung an der Küste	Überfahrbar	Begehrbar
ES	Clasificación IP	Resistente al fuego	Resistente a las huellas dactilares	Uso costero	Transitable en coche	Transitable a pie
SW	IP Klass	Brandklassad	Resistent mot fingeravtryck	Kustnära användning	Överkörningsbar	Gångbar
HU	IP kategória	Tűzvédelmi besorolás	Ujjlenyomat-ellenálló	Vízpart menti használat	Terhelhető	Járható

						
EN	De-mister	Cut-out size	Minimum depth	Track compatible	New	Limited stock
FR	Système de Desembuage	Découpe	Profondeur Minimale	Rail compatible	Nouveauté	Stock limité
NL	Anti Condens	Inbouw maat	Minimale diepte	Gebruikbaar voor Track	Nieuw	Beperkte voorraad
DE	Entmisterung	Ausschnittgröße	Minimale Tiefe	Kompatibel mit dem Gleis	Neu	begrenzter Bestand
ES	Anticondensación	Corte de empotramiento	Profundidad mínima	Vía compatible	Nuevo	Stock limitado
SW	Anti im funktion	Håltagnings mått	Minsta djup	Avsedd för skena	Nyhet	Begränsat antal
HU	Páramentesítő	Kivágás mérete	Minimum süllyesztés	Sín kompatibilis	Új	Korlátozott készlet

guide to finishes

					
EN	Sand white	Matt White	Sand Black	Matt Black	Passivated Black
FR	Sable Blanc	Blanc Mat	Sable Noir	Noir Mat	Noir Passivé
NL	Zandkleur Wit	Mat Wit	Zandkleur Zwart	Mat Zwart	Passivated Zwart
DE	Sandweiß	Mattes Weiß	Sandschwarz	Mattschwarz	schwarz passiviert
ES	Blanco arena	Blanco mate	Negro arena	Negro mate	Negro pasivo
SW	Sand	Matt vit	Sand svart	Matt svart	passiveras svart
HU	Homokfehér	Matt fehér	Homokfekete	Matt fekete	Passzívált fekete

					
EN	Satin Nickel	Polished Chrome	Satin Stainless Steel	Antique Brass	Painted Gold
FR	Nickel Satiné	Chrome Poli	Inox Satiné	Cuivre Antique	Peint en Or
NL	Satijn Nikkel	Chroom Gepolijst	Satijn Roestvrij Staal	Antiek Messing	Goud Gelakt
DE	Satin-Nickel	Poliertes Chrom	Satinierter Edelstahl	Antikes Messing	Gold lackiert
ES	Niquel satinado	Cromo pulido	Acero inoxidable satinado	Bronce envejecido	Oro pintado
SW	Borstad stål	Blank krom	Rostfritt	Antik mässing	Guld
HU	Szatén nikkel	Króm	Szatén rozsdamentes acél	Antik bronz	Festett arany

					
EN	Gold Anodised*	Painted Bronze	Bronze Anodised*	Graphite	Dark Grey
FR	Or Anodisé	Peint en Bronze	Bronze Anodisé	Graphite	Gris Foncé
NL	Goud Geanodiseerd	Brons Gelakt	Brons Geanodiseerd	Grafiet	Donker Grijs
DE	Goldeloxiert	Lackierte Bronze	Bronze Eloxiert	Graphit	Dunkel Grau
ES	Oro Anodizado	Bronce pintado	Bronce Anodizado	Grafito	Gris oscuro
SW	Anodiserad guld	Brons	Anodiserad brons	Grafit	Mörk grå
HU	Anodizált arany	Festett bronz	Anodizált bronz	Grafit	Sötét szürke

		
EN	Coconut	Mushroom
FR	Noix de Coco	Champignon
NL	Coconut	Mushroom
DE	Kokosnuss-An	Pilz-Auf
ES	Coco	Champion
SW	Coconut	Mushroom
HU	Kókusz fehér	Gomba barna

*Living finishes

Living finishes change over time. Anodised finishes may appear slightly darker after a period of 3 years due to continued oxidation of the surface of the product.

product code index

AM-VUL2	55	DL-SLIMIPB	77	IPR-PLOT3SS	185	PA-HEY-B	43
AM-VUL4	55	DL-SLIMIPW	77	IPR-PLOT4SS	185	PA-HEY-W	43
BA-M-ACQUA	214	DL-SLIMSQB	75	IPR-WRB	96	PA-VER-B	48
BA-VEN90	159	DL-SLIMSQW	75	IPR-WRB27	96	PA-VER-W	48
BA-VER90	159	DL-SLIMW	75	IPR-WRB27-AC	96	PE-ADA100-B	37
CE-AND-B	59	DL-SOPWB	79	IPR-WRB-AC	96	PE-ADA100-GO	37
CE-AND-W	59	DL-WASH	71	IPR-WRW	96	PE-ANN-B	56
CE-ANN-B	57	DL-WWW	70	IPR-WRW27	96	PE-ANN-BZ	56
CE-ANN-BZ	57	DL-ZELRB	76	IPR-WRW27-AC	96	PE-ANN-GO	56
CE-ANN-GO	57	DL-ZELRW	76	IPR-WRW-AC	96	PE-ANN-W	56
CE-ANN-W	57	DR350- (all)	219	IPR-WSLB	95	PE-APO-B	60
CE-HEY60-B	43	DR700- (all)	219	IPR-WSLB27	95	PE-APO-W	60
CE-HEY60-W	43	EUF5-CIA-BZ	169	IPR-WSLB27-AC	95	PE-ARA100-B	35
CE-HEY90-B	43	EUF5-CIA-GO	169	IPR-WSLB-AC	95	PE-ARA100-BZ	35
CE-HEY90-W	43	EUF5-OLY-AB	173	IPR-WSLW	95	PE-ARA100-GO	35
CE-HONRB	61	EUF5-OLY-SN	173	IPR-WSLW27	95	PE-ARA100-W	35
CE-HONRW	61	EUTA-CIA-BZ	168	IPR-WSLW27-AC	95	PE-ARA150-B	36
CE-HONSQB	61	EUTA-CIA-GO	168	IPR-WSLW-AC	95	PE-ARA150-BZ	36
CE-HONSQW	61	EUTA-LIB2-B	171	L10113-27	219	PE-ARA150-GO	36
CE-LINO2-B	32	EUTA-LIB2-W	171	L10113-3	219	PE-ARA150-W	36
CE-LINO2-W	32	EUTA-OLY-AB	172	L10113-4	219	PE-ARA60-B	34
CE-PER130	47,206	EUTA-OLY-AB-USB	172	LED-PROJ1W-B	153	PE-ARA60-BZ	34
CE-PRI35-B	26	EUTA-OLY-SN	172	LED-PROJ1W-W	153	PE-ARA60-GO	34
CE-PRI35-GO	26	EUTA-OLY-SN-USB	172	MOD1W(all)	218	PE-ARA60-W	34
CE-PRI45-B	26	FL-ADM30-W	50	OD-BEA-G	188	PE-ART-B	60
CE-PRI45-GO	26	FL-ADM40-W	50	OD-BER2-G	199	PE-ART-W	60
CE-SWI-B	59	FL-BAN23-B	51	OD-CHIBA	205	PE-CLIP	54
CE-SWI-W	59	FL-BAN35-B	51	OD-CON-G	194	PE-COM2-BS	40
CE-VER30-B	48	FL-ETE55-WS	45	OD-CONP-G	194	PE-COM2-WS	40
CE-VER30-W	48	FL-GRA30-B	25	OD-FARP	191	PE-ETE55-BS	45
CE-VER40-B	48	FL-GRA30-GO	25	OD-FARR	190	PE-ETE55-WS	45
CE-VER40-W	48	FL-GRA50-B	25	OD-FPOLE	190	PE-ETE78	44
DL-DIA-W	101	FL-GRA50-GO	25	OD-GRO230-G	193	PE-LAS6-B	53
DL-GLAR	78	FL-SAT40-WS	46	OD-GRO280-G	193	PE-LAS6-W	53
DL-GRID1BB	72	FL-SAT60-WS	46	OD-GRO30-G	192	PE-ORB120-BS	39
DL-GRID1FRWB	73	FS-CIA-BZ	169	OD-GRO80-G	192	PE-ORB120-BZ	39
DL-GRID1FRWW	73	FS-CIA-GO	169	OD-KYOS	204	PE-ORB120-GO	39
DL-GRID1WB	72	FS-OLY-AB	173	OD-LAN-G	197	PE-ORB120-WS	39
DL-GRID1WW	72	FS-OLY-SN	173	OD-MAY-G	201	PE-VIST-B	31
DL-GRID2BB	72	IPR-EUSSS	183	OD-SAN80-G	189	PE-VISTR-B	29
DL-GRID2FRBB	73	IPR-HOLSS	100	OD-SAPL-GW	209	PE-VISTR-W	29
DL-GRID2FRWB	73	IPR-HOLSSAG	101	OD-SAPS-GW	208	PE-VIST-W	31
DL-GRID2FRWW	73	IPR-HOXCP	100	OD-SAV-G	196	PL-AVRON	162
DL-GRID2WB	72	IPR-HOXSS	100	OD-SAVP-G	198	PL-BLA	92
DL-GRID2WW	72	IPR-PADRSS15	187	OD-STR-G	201	PL-BLA27	92
DL-MINW	65	IPR-PADRSS30	187	OD-SUZ-GW	209	PL-BLAGU10	94
DL-POLW	69	IPR-PADSSS15	187	OD-TOKYO	205	PL-BOU	92
DL-SLIM2FRB	74	IPR-PICRSS	186	OD-TRA-B	203	PL-BOU27	92
DL-SLIM2FRW	74	IPR-PLOT1SS	185	OD-TRA-W	203	PL-CADET	163
DL-SLIMB	75	IPR-PLOT2SS	185	OD-YOK	207	PL-CONCO	164

PL-CONCS	164	SH-VICLED-R-MB	150	SP-MOOR-B	67	TR-XC-B	115
PL-EUROR	165	SH-VICLED-SN	149	SP-MOOR-W	67	TR-XC-W	115
PL-MINW	65	SH-WBPIM2-AB	138	SP-SEL3L-B	127	WL-ANN1-B	135
PL-POLW	69	SH-WBPIM2-CP	138	SP-SEL3L-W	127	WL-ANN1-BZ	135
PL-PYREN	90	SH-WBPIM2-MB	138	SP-SEL3R-B	126	WL-ANN1-GO	135
PL-PYREN27	90	SH-WBPIM2R-AB	139	SP-SEL3R-W	126	WL-ANN1-W	135
PL-REN1	86	SH-WBPIM2R-CP	139	TA-CIA-BZ	168	WL-ANN2-B	135
PL-REN2	87	SH-WBPIM2R-MB	139	TA-CIA-GO	168	WL-ANN2-BZ	135
PL-RENWW	87	SH-WBPIM2R-SN	139	TA-LIB2-B	171	WL-ANN2-GO	135
PL-ROM1	88	SH-WBPIM2-SN	138	TA-LIB2-W	171	WL-ANN2-W	135
PL-ROM2	88	SH-WBVIC-AB	140	TA-OLY-AB	172	WL-ANNR-B	137
PL-SAB1-B	83	SH-WBVIC-MB	140	TA-OLY-AB-USB	172	WL-ANNR-BZ	137
PL-SAB1-W	83	SH-WBVICR-AB	141	TA-OLY-SN	172	WL-ANNR-GO	137
PL-SAB2-B	83	SH-WBVICR-MB	141	TA-OLY-SN-USB	172	WL-BLF-B	146
PL-SAB2-W	83	SH-WBVICR-SN	141	TR-1(all)	114	WL-BLF-W	146
PL-SIMPL	90	SH-WBVIC-SN	140	TR-2(all)	114	WL-CIAR-BZ	147
PL-SIMPL27	90	SP-ANN1-BZ	119	TR-AND-B	110	WL-CIAR-GO	147
PL-SLIMB	82	SP-ANN1-GO	119	TR-AND-W	110	WL-HALK	145
PL-SLIMIPB	82	SP-ANN2-BZ	120	TR-ANN-B	107	WL-HALKB	145
PL-SLIMIPW	82	SP-ANN2-GO	120	TR-ANN-BZ	105	WL-LASR-B	143
PL-SLIMW	82	SP-ANN3-BZ	120	TR-ANN-GO	105	WL-LASR-W	143
PL-TROCA	89	SP-ANN3-GO	120	TR-ANN-W	107	WL-LB10	157
PL-ZELRB	80	SP-ANN4-BZ	121	TR-CC-B	115	WL-LB20	157
PL-ZELRW	80	SP-ANN4-GO	121	TR-CC-W	115	WL-LB38	157
PL-ZELSQB	81	SP-CIA1-BZ	116	TR-EC-B	115	WL-MAR-B	151
PL-ZELSQW	81	SP-CIA1-GO	116	TR-EC-W	115	WL-MAR-SN	151
RW-RUN-B	99	SP-CIA3-BZ	117	TR-FC-B	115	WL-MLW-B	148
RW-RUN-GO	99	SP-CIA3-GO	117	TR-FC-W	115	WL-MLW-W	148
RW-RUN-W	99	SP-CIA4-BZ	117	TR-LAS-B	109	WL-ODO20-W	161
RW-STP-B	98	SP-CIA4-GO	117	TR-LAS-W	109	WL-ODO30-W	161
RW-STP-GO	98	SP-JUP1-B	129	TR-LC-B	115	WL-PRL-B	144
RW-STP-W	98	SP-JUP1-W	129	TR-LC-W	115	WL-PRL-W	144
SH-CO-C	178	SP-JUP2-B	129	TR-LIB-B	108	WL-SLO1N-B	155
SH-CO-M	178	SP-JUP2-W	129	TR-LIB-WW	108	WL-SLO1N-W	155
SH-DIF40	177	SP-LAS1S-B	142	TR-MJ-B	115	WL-SLO2-B	155
SH-DR15-C	177	SP-LAS1S-W	142	TR-MJ-W	115	WL-SLO2-W	155
SH-DR15-M	177	SP-MOO1-B	123	TR-ORI2-B	106	WL-SOU24-B	154
SH-DR30-C	177	SP-MOO1R-B	123	TR-ORI2-BZ	105	WL-SOU24-W	154
SH-DR30-G	177	SP-MOO1R-W	123	TR-ORI2-GO	105	WL-SUN-B	133
SH-DR30-M	177	SP-MOO1S-B	123	TR-ORI2-W	106	WL-SUN-BZ	133
SH-DR40-C	177	SP-MOO1S-W	123	TR-PEN-B	113	WL-SUN-GO	133
SH-DR40-G	177	SP-MOO1-W	123	TR-PEN-W	113	WL-SUN-W	133
SH-DR40-M	177	SP-MOO2-B	125	TR-SUS-B	115	WL-VAV120	158
SH-P3-SN	179	SP-MOO2-W	125	TR-SUS-W	115	WL-VAV60	158
SH-RL-C	178	SP-MOO3-B	124	TR-T1(all)	114	WL-VAV90	158
SH-RL-M	178	SP-MOO3L-B	124	TR-T2(all)	114	WL-VAVS120	158
SH-RS-C	178	SP-MOO3L-W	124	TR-TAU-B	111	WL-VAVS60	158
SH-RS-M	178	SP-MOO3-W	124	TR-TAU-W	111	WL-VAVS90	158
SH-SF3-SN	179	SP-MOO4-B	125	TR-TC-B	115		
SH-VICLED-MB	149	SP-MOO4-W	125	TR-TC-W	115		

product name index

3 light semi flush	179	eternity 78cm	44	orbit 120cm	39	suzuka slot	209
acqua	214	europe	165	orion 2 track	105,106	swivel	59
ada 100cm	37	euston 230V	183	paddington	187	taurus LED track	111
andaman	50	farringdon	190	pendant adapter	113	tokyo	205
andromeda	59	glacier	78	peri	47, 206	track accessories	115
andromeda track	110	grace	25	perla	144	Track kits	114
anna ceiling	57	grid 1	72	piccadilly	186	Track lengths	114
anna pendant	56	grid 1 FR	73	pimlico 2	138	trafalgar GU10	203
anna reader	137	grid 2	72	pimlico 2 reader	139	trocadero	89
anna spot	118-121	grid 2 FR	73	plot light	185	vavin	158
anna track	105,107	grosvenor	192	polo	69	venti	159
anna wall	135	grosvenor II	193	prisma	26	veritas	159
apollo pendant	60	halkin	145	pyrenees IP65	96	verve	48
ara 100cm	35	hey-lo	43	pyrenees plaster	91	victoria	140
ara 150cm	36	holborn IP65	100-101	renne	86-87	victoria LED	149-150
ara 60cm	34	honos	61	rome	88	victoria reader	141
artemis pendant	60	hoxton IP65	100	runway steplight	99	vistina long	31
avron	162	jupiter	129	sablons	83	vistina round	29
banda	51	kyoto	204	sanderson	189	vulcan	55
beaumont	188	lanesborough	197	sapporo	209	wall washer	70
berkeley	199	large rectangle shade	178	sapporo square	208	yokohama	207
blackfriars	146	laser pendant	53	saturn	46	zelda round	76
blanche GU10	94	laser reader	143	savoy	196	zelda trimless	80-81
blanche LED	93	laser spot	142	savoy plus	198		
boulogne LED	93	laser track	109	selene	126-127		
cadet	163	libra 2	171	shades	176-178		
chiba duo	205	libra track	108	simplon IP65	95		
ciara spot	116-117	lino 2 pendant / flush	32	simplon plaster	91		
ciara table/floor	169	london bridge	157	slim trim	75		
ciara wall	147	marlow usb	148	slim trim 2 FR	74		
clip pendant	54	marylebone	151	slim trim IP65	77		
compass 2m	40	mayfair	201	slim trimless	82		
concorde	164	mini	65	sloane	155		
cone shade	178	mini projector	153	small rectangle shade	178		
connaught	194	moon recessed	67	sophie	79		
diana	101	moon spot	122-125	southwark	154		
drum shades	177	odeon	161	steplight	98		
E27 suspension	179	olympia floor	173	strand	201		
eternity 55cm	45	olympia table	172	sunrise	133		

Additional information

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.



Contact us (UK & Ireland):

info@projectcollection.co.uk

UK Office and Showroom

Manchester: +44 (0) 161 203 3456

UK OFFICE & SHOWROOM
Searchlight Electric Ltd
Sidney House
900 Oldham Road, Manchester
M40 2BS, United Kingdom

project
collection
www.projectcollection.co.uk

HEADQUARTERS
UK OFFICE & SHOWROOM
Searchlight Electric Ltd
Sidney House
900 Oldham Road, Manchester
M40 2BS, United Kingdom
+44 (0)161 203 3300

Contact us (Europe and International):

international@searchlightelectric.com

Germany Office and Showroom

Sauerland: +49 6131 276 3003

GERMANY OFFICE & SHOWROOM
Searchlight Electric Ltd
Lichthaus
Lucienstrasse 50
59757 Arnsberg, Germany

France Office

Lyon: +33 4 87 94 03 47

Sweden Office

Stockholm: +46 8 121 607 51

Benelux Office

+31 621 80 68 76

EUROPEAN REGISTERED OFFICE
Searchlight Electric International Ltd
The Black Church
St Mary's Place, Dublin 7
D07 P4AX, Ireland

WAREHOUSE EUROPE
Searchlight Electric / Clipper Logistics
UL Stachowska 16
Number 9
62-023 Robakowo, Poland



2025/26

+44 (0) 161 203 3456
info@projectcollection.co.uk

